

Application of Multiple Artifact Correction in Digital Core Pore Structure Extraction

Bohong Yan¹, Jianguo Zhao¹, Jun Matsushima², Bin Wang¹, Fang Ouyang¹, Zhi Li¹, Zengjia Xiao¹, and Ming Ma¹

¹China University of Petroleum

²The Univ of Tokyo

November 22, 2022

Abstract

Digital core techniques based on CT scan imaging can accurately describe the pore space of rocks, which provides a significant tool for studying the influence of rock pore structure on its macroscopic physical properties. However, with the increasingly intensive use of CT scanning in the field of petrophysics, the various artifactual interferences accompanying the imaging itself have become more prominent. Common artifacts in core CT scanning imaging include ring artifacts, star artifacts, and hardening artifacts, etc. The presence of these artifacts greatly affects the imaging quality and as a result further affect the quality of subsequent image processing and segmentation. Therefore, the correction of scanning artifacts is very important. Generally, the artifacts are eliminated by improving scanning experiments or image processing. However, these traditional artifact correction methods, especially for hardening artifacts, have some common problems, such as unclear elimination or poor applicability. To solve the problems, we propose a new method for artifact correction. In this method, we calculate a local correction curve (surface) by sliding the 3D window vertically, and use this curve (surface) to eliminate hardening artifact interference in both vertical and horizontal directions. By applying the method to the digital cores, we find that it is not only effective in removing the effects of multiple artifacts but also in preserving the original slice information. The results show that the same density voxels corrected by bi-directional artifacts in the vertical and horizontal directions were more consistent in the gray-scale distribution, which means that the corrected slices avoided over-segmentation in the central region and extracted the complete pore structure in the edge region. As a result, the corrected high-quality core slices can be obtained. On this basis, we further compare the pore aspect ratio and specific surface area parameters extracted from the corrected and non-corrected slices. It shows that the artifacts correction has a significant effect on the extraction results of pore structure parameters, which reflects the importance of artifact correction in scanning imaging.

Application of Multiple Artifact Correction in Digital Core Pore Structure Extraction

Application of Multiple Artifact Correction in Digital Core Pore Structure Extraction
 Bohong Yan[1], Jianguo Zhao[1], Jun Matsushima[2], Bin Wang[1], Ming Ma[1]
 [1] China University of Petroleum (Beijing) [2] The University of Tokyo

Artifacts in CT Scans
 The X-ray Computed Tomography (CT) imaging process is disturbed by various artifacts. These artifacts make it difficult to

Methodology
 According to the correction process, the ring artifacts can be suppressed by improving the segmentation method. After obtaining the original image, the ring artifacts can be suppressed by the BM3D method. Therefore, in the process of the denoising without correction, the original image is a CT image that has been denoised by the BM3D method. This denoising correction algorithm includes horizontal correction and vertical correction.

Sandstone Correction Example
 We performed a CT scan result of a sandstone sample with a measured porosity of 12.7%. For the two sets of slices before and after removing the artifacts, the Otsu algorithm is applied to segment the images. Before correction, the

Influence of pore structure parameter extraction
 In this paper, we propose a set of artifact removal processes with high repeatability. It is concluded that the correction process can effectively improve the influence of artifacts on the pore structure parameter extraction. The corrected slice avoids over-segmentation in the central area and extracts

Multiple Artifact Correction Process

```

    graph TD
      A[CT Scanning] --> B[Original Image]
      B --> C[Remove Ring Artifact (MAR)]
      C --> D[Image Segmentation]
    
```

Conclusion

Author Information | Disclosure | Abstract | Experience | Contact Author | Print | Get Poster

Bohong Yan[1], Jianguo Zhao[1], Jun Matsushima[2], Bin Wang[1], Ming Ma[1]

[1] China University of Petroleum (Beijing) [2] The University of Tokyo




PRESENTED AT:

AGU FALL MEETING
 New Orleans, LA & Online Everywhere
 13-17 December 2021

Poster Gallery brought to you by **WILEY**


ARTIFACTS IN CT SCANS

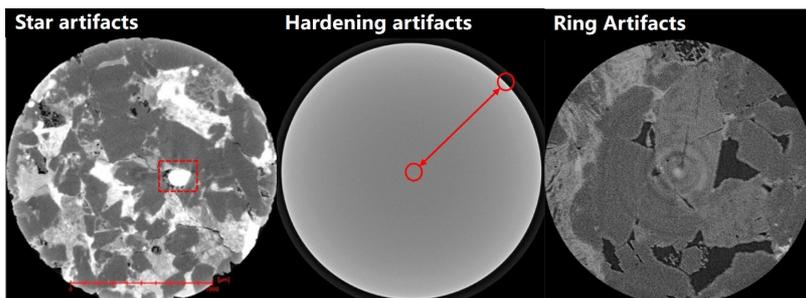

The X-ray Computed Tomography (CT) imaging process is disturbed by various artifacts. These artifacts make it difficult to accurately characterize the rock pore structure. Common artifacts CT in scans include star artifacts, ring artifacts and hardening artifacts, et al.

- Star artifacts appear on the image as bright areas extend to the surroundings. This area corresponds to high-density minerals in the rock. The highlight streaks of artifacts will extend a short distance nearby. Therefore, the nearby medium will be masked. (Left Figure: CT scan image of a sandstone sample)
- Hardening artifacts appear on the image as dark and bright edges in the middle. This artifact is mainly caused by the non-uniform attenuation of X-rays when they penetrate the object. (Middle Figure: CT scan image of pure aluminum sample)
- Ring artifacts appear as complete or partial ring-shaped interference. The center of the ring is the rotation center of the sample. This artifact is mainly caused by the inconsistent response of the X-ray detector. (Right Figure: CT scan image of a carbonate rock sample)


MULTIPLE ARTIFACT CORRECTION PROCESS

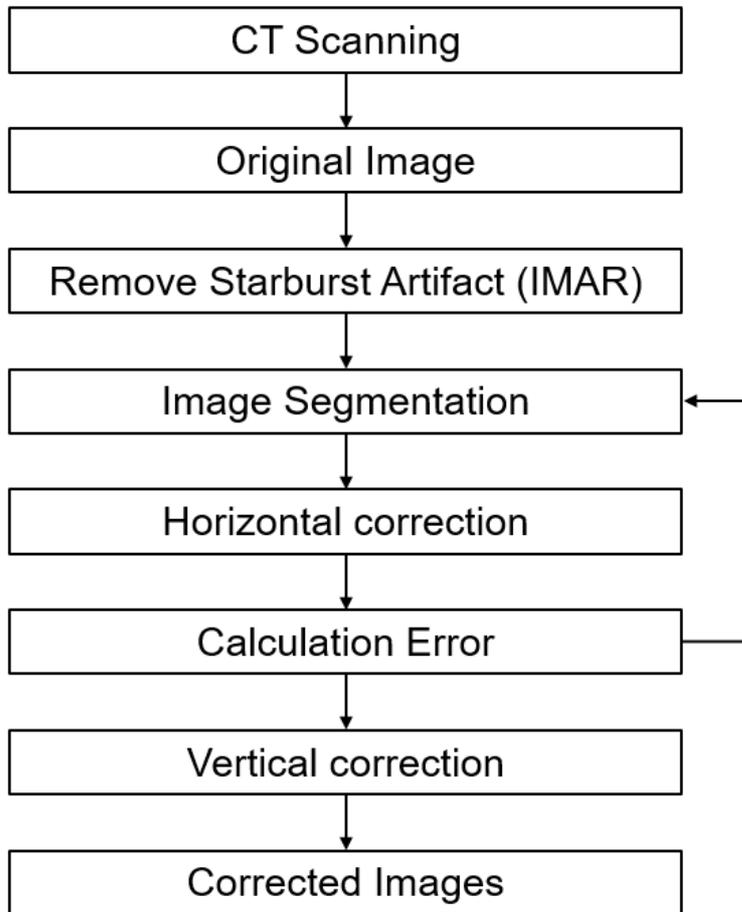


The processing flow we give can correct the above three kinds of artifacts. First, introduce displacement for the detector in the CT scan to realize dynamic acquisition. The "jitter" of this detector can suppress ring artifacts. Subsequently, the IMAR method based on Random transform is applied, which is often used in medical imaging. The IMAR method can suppress star artifacts. Finally, a correction model is determined by three-phase segmentation and filtering. Iterative optimization correction model until the error range is satisfied. Apply the correction model to the two-dimensional slice sequence to complete the hardening correction in both the horizontal and vertical directions.

METHODOLOGY

According to the correction process, the ring artifact can be suppressed by improving the acquisition method. After obtaining the original image, the star artifact can be suppressed by the IMAR method. Therefore, in the iteration of hardening artifact correction, the input image is a CT image that has been dynamically acquired and processed by the IMAR method. The hardening correction algorithm includes horizontal correction and vertical correction.

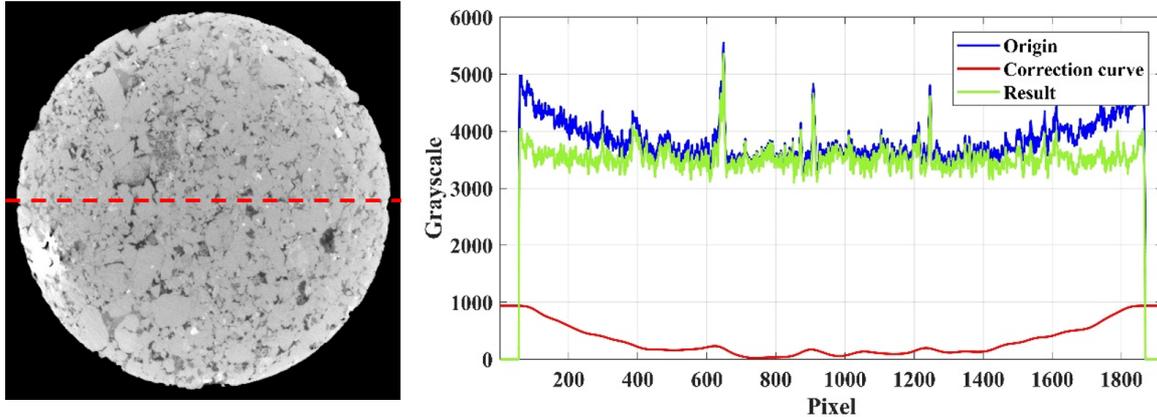

- Horizontal correction combines three-phase segmentation and image filtering. The three-phase segmentation is realized by the local adaptive Otsu segmentation algorithm. The core slice image will be divided into three phases: pores, main matrix, and high-density minerals. The gray values of pores and high-density mineral regions are filled with the lower limit gray level and the upper limit gray level of the main matrix area, respectively. Denoising and smoothing on this basis has little effect on pores and high-density minerals. The segmentation step minimizes the loss of image information caused by correction. After segmentation and filtering, the correction model is updated iteratively. Calculate the update error of the model until the error is less than the set range and then jump out of the iteration.

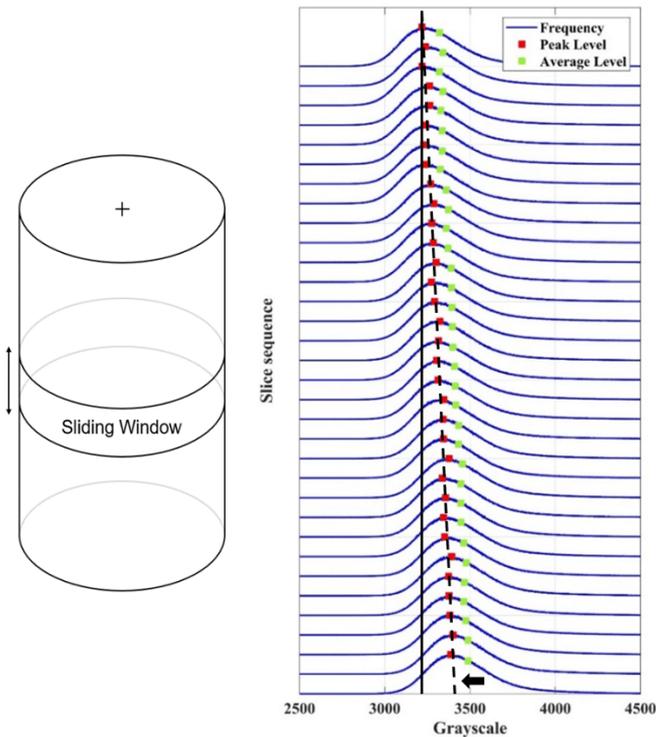


$$Cor(x_{slice}) = \frac{1}{2} \cdot (Gray_{avg} - a_{avg} \cdot x_{slice} - b_{avg}) + \frac{1}{2} \cdot (Gray_{avg} - a_{peak} \cdot x_{slice} - b_{peak})$$


- The vertical correction model is determined by gray-scale statistics and linear fitting. First, the cumulative gray distribution is obtained by statistics in the sliding window. A series of average gray values and peak gray values can be obtained. After normalization, the two sets of data are linearly fitted and the deviation from the vertical straight line are calculated, respectively. Then calculate the correction value by the above formula.

SANDSTONE CORRECTION EXAMPLE


Before Correction

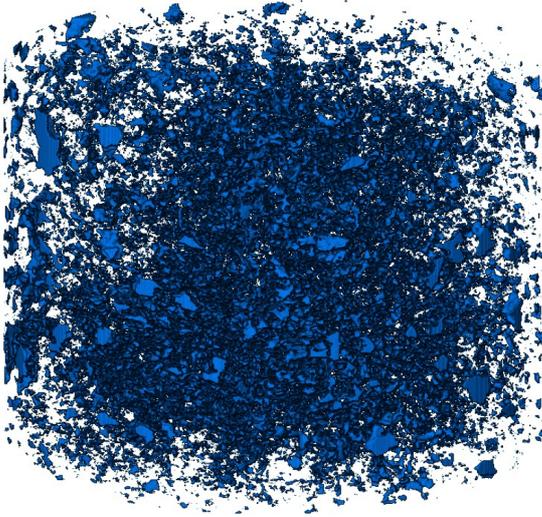

After Correction

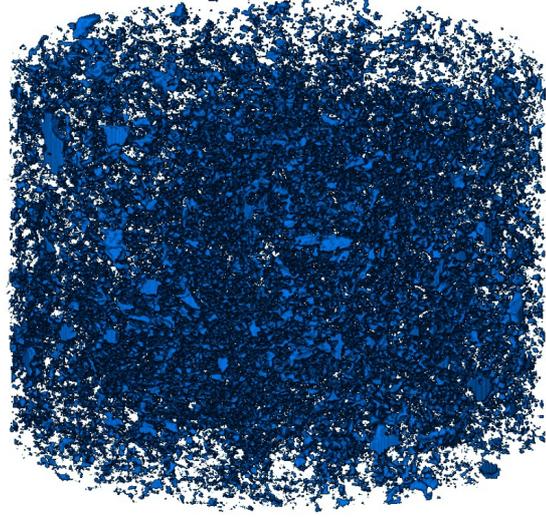


We performed a CT scan result of a sandstone sample with a measured porosity of 12.7%. For the two sets of slices before and after removing the artifacts, the Otsu algorithm is applied to segment the images. Before correction, the corresponding calculated porosity of the pore structure is 8.114%. After correction, the calculated porosity is 8.634%.

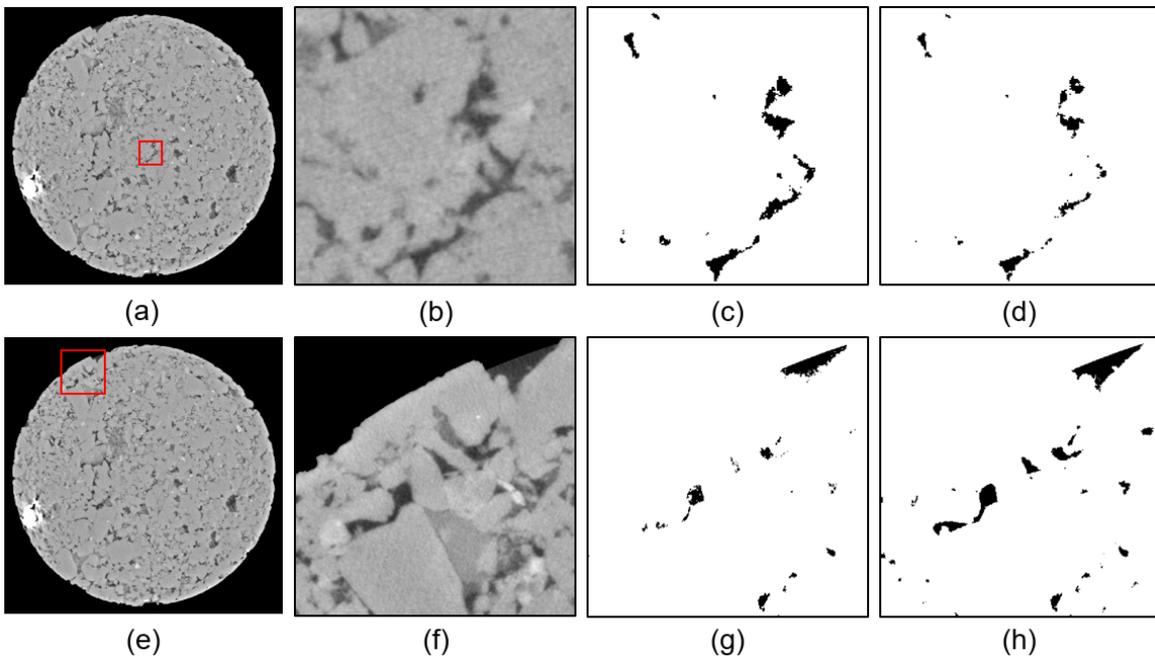

Comparing binarized slices, we found that there is obvious over-segmentation in the central area of the uncorrected slice. At the same time, there are a large number of insufficient segmentation of the pores in the edge area.

INFLUENCE OF PORE STRUCTURE PARAMETER EXTRACTION

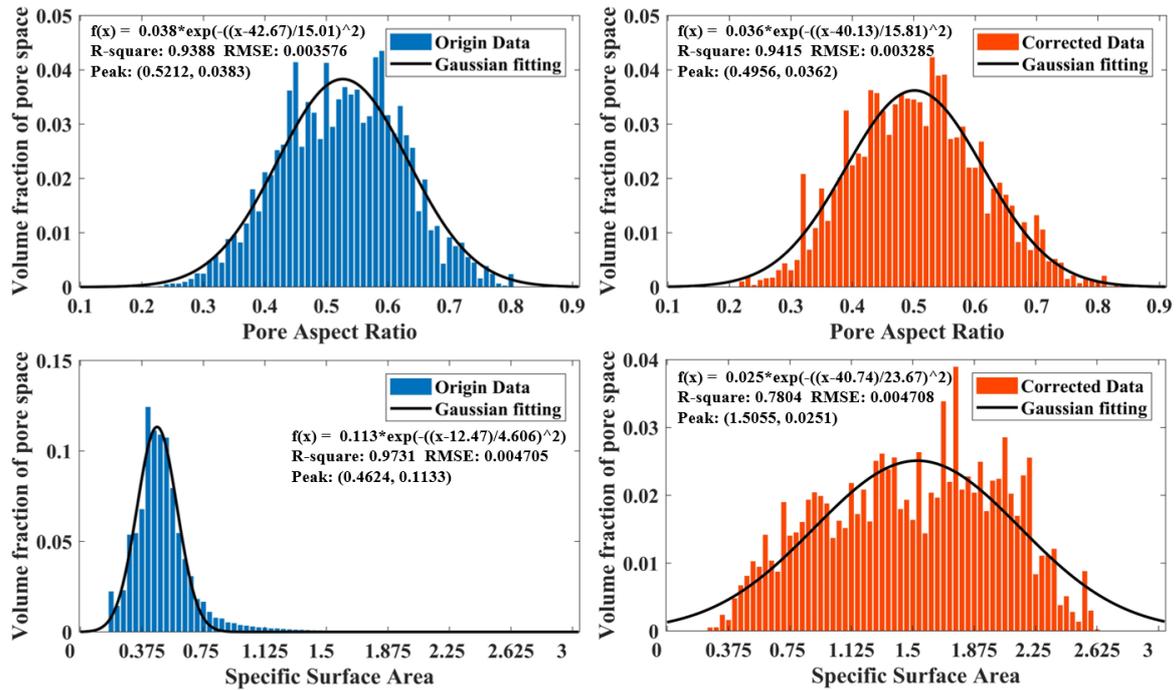

Based on the two sets of data before and after the correction, the pore structure parameters are calculated respectively. Based on the watershed algorithm and the ellipsoid approximation, the pore structure parameters can be calculated for the two sets of data before and after correction, respectively. The figure shows the statistical specific surface area and pore aspect ratio. We found that the pore aspect ratios before and after correction were similar, but their specific surface areas had significant differences.

CONCLUSION

In this paper, we propose a set of artifact removal process with high applicability. It is verified that the correction process can effectively remove the influence of multiple artifacts. The corrected slice avoids over-segmentation in the central area and extracts a complete pore structure in the edge area. At the same time, the correction process has a significant impact on the extraction of some pore structure parameters. The artifact correction process can also be extended to carbonate samples with well-developed pores and shale samples with low porosity and permeability.

DISCLOSURES

Funded by:

Cross-band (from seismic to ultrasonic frequency) petro-physical experiment and modeling research on carbonate reservoirs, the general project of National Natural Science Foundation of China, project number: 41574103, responsible;

Cross-band rock physics experiment and theory-driven seismic velocity dispersion prediction and imaging, the general project of National Natural Science Foundation of China, project number: 41974120, responsible;

Key technology of geophysical exploration at Lower Paleozoic-Precambrian - Cross-band petro-physical testing, modeling and seismic response characteristics research, national science and technology major project, responsible.

AUTHOR INFORMATION

Introduction of the first author:

Bohong Yan, male, born in July 1998, currently studying at China University of Petroleum (Beijing), mainly engaged in digital rock physics research. E-mail: bhyan0708@foxmail.com.

Corresponding Author:

Jianguo Zhao, male, born in December 1976, professor of the College of Geophysics, China University of Petroleum (Beijing), mainly engaged in seismic wave propagation, digital core, cross-band seismic rock physics experimental technology and theoretical research. E-mail: zhaojg@cup.edu.cn.

ABSTRACT

Digital core techniques based on CT scan imaging can accurately describe the pore space of rocks, which provides a significant tool for studying the influence of rock pore structure on its macroscopic physical properties. However, with the increasingly intensive use of CT scanning in the field of petrophysics, the various artifactual interferences accompanying the imaging itself have become more prominent ([1]). Common artifacts in core CT scanning imaging include ring artifacts, star artifacts, and hardening artifacts, etc. The presence of these artifacts greatly affects the imaging quality and as a result further affect the quality of subsequent image processing and segmentation. Therefore, the correction of scanning artifacts is very important ([2], [3]). Generally, the artifacts are eliminated by improving scanning experiments or image processing ([4], [5], [6]). However, these traditional artifact correction methods, especially for hardening artifacts, have some common problems, such as unclear elimination or poor applicability. To solve the problems, we propose a new method for artifact correction. In this method, we calculate a local correction curve (surface) by sliding the 3D window vertically, and use this curve (surface) to eliminate hardening artifact interference in both vertical and horizontal directions. By applying the method to the digital cores, we find that it is not only effective in removing the effects of multiple artifacts but also in preserving the original slice information. The results show that the same density voxels corrected by bi-directional artifacts in the vertical and horizontal directions were more consistent in the gray-scale distribution, which means that the corrected slices avoided over-segmentation in the central region and extracted the complete pore structure in the edge region. As a result, the corrected high-quality core slices can be obtained. On this basis, we further compare the pore aspect ratio and specific surface area parameters extracted from the corrected and non-corrected slices. It shows that the artifacts correction has a significant effect on the extraction results of pore structure parameters, which reflects the importance of artifact correction in scanning imaging.

REFERENCES

- [1] Heiko Andrä, et al. Digital rock physics benchmarks—Part I: Imaging and segmentation[J]. Computers & Geosciences, 2013, 50(1):25-32.
- [2] GeetM V, et al. Quantitative analysis of reservoir rocks by microfocus X-ray computerised tomography[J]. Sedimentary Geology, 2000.
- [3] Zhao Jianguo, et al. 2021. Digital rock physics-based studies on effect of pore types on elastic properties of carbonate reservoir Part 1: Imaging processing and elastic modelling, Chinese Journal of Geophysics(in Chinese), 64(2): 656-669, doi: 10.6038/cjg202100228.
- [4] Ikeda Susumu, et al. Three-dimensional study on the interconnection and shape of crystals in a graphic granite by X-ray CT and image analysis[J]. Mineralogical Magazine, 2000, 64(5):945-959.
- [5] Ketcham R A, et al. Acquisition, optimization and interpretation of X-ray computed tomographic imagery: applications to the geosciences[J]. Computers & Geosciences, 2001, 27(4):381-400.
- [6] Iassonov P, et al. Application of Segmentation for Correction of Intensity Bias in X-Ray Computed Tomography Images[J]. Vadose Zone Journal, 2010, 9(1):187-191.

 Upload new