

Field Results from New Tensor Borehole Optical Fiber Strainmeter Installations in Oklahoma and Utah

Scott DeWolf¹

¹Affiliation not available

February 16, 2024

ABSTRACT

The time evolving strain field contains a wealth of information that can be used to interpret subsurface behavior. For example, injecting or removing fluids from reservoirs or aquifers causes deformation that can be used as a diagnostic signal in some cases, while it can interfere with geodetic interpretations in other cases. We've previously demonstrated the feasibility of measuring the strain tensor at a depth of 30m caused by injection into a reservoir at 530m. The observed strain signals were interpreted using four independent analytic and numerical methods that resulted in estimates of the poroelastic properties and geometry of the reservoir that was consistent with data from well logs. However, studies like these are only possible if these deformations can be reliably measured.


Years of lab and field work has culminated in the development of a novel borehole strainmeter capable of resolving multiple components of strain using embedded optical fibers configured as Michelson interferometers. It features four horizontal gauges separated by 45° to resolve the horizontal strain tensor as well as a vertical strain gauge and a sixth null component for

state-of-health monitoring. The downhole sensing package also includes an open pipe through its center for grout circulation during single-trip deployments and a fully welded stainless steel exterior for robustness and longevity. These instruments have a resolution of 2×10^{-13} strain that can easily measure the solid earth tides.

Preliminary data are available from four strainmeters in shale at our Oklahoma site and four in compacted sand and gravel in Utah. These are deployed from 40-60m, except one of the strainmeters in Oklahoma is deployed at 500m. The data include strains from the initial grout curing, comparisons to predicted earth tide models and in-situ calibration results, barometric pressure admittances and spectral analyses as well as signals from underground injections and surface waves from teleseismic events. Preliminary analyses indicate behavior consistent with other strainmeter deployments, and comparison to data from a Gladwin strainmeter at the Oklahoma site validate the performance of the new design. Analyses from a suite of six well tests at the Oklahoma site show for the first time how the strain tensor field varies with location during well testing.



1. Elliptical Ring Tensor Optical Fiber Strainmeter

The optical fiber tensor strainmeter developed at Clemson University is now available commercially as the Tensor Sensor™ through our new venture Tensora, Inc. It features four stacked horizontal strain gauges, a dedicated vertical strain gauge and a standalone reference. It can be deployed wire, pipe or casing.

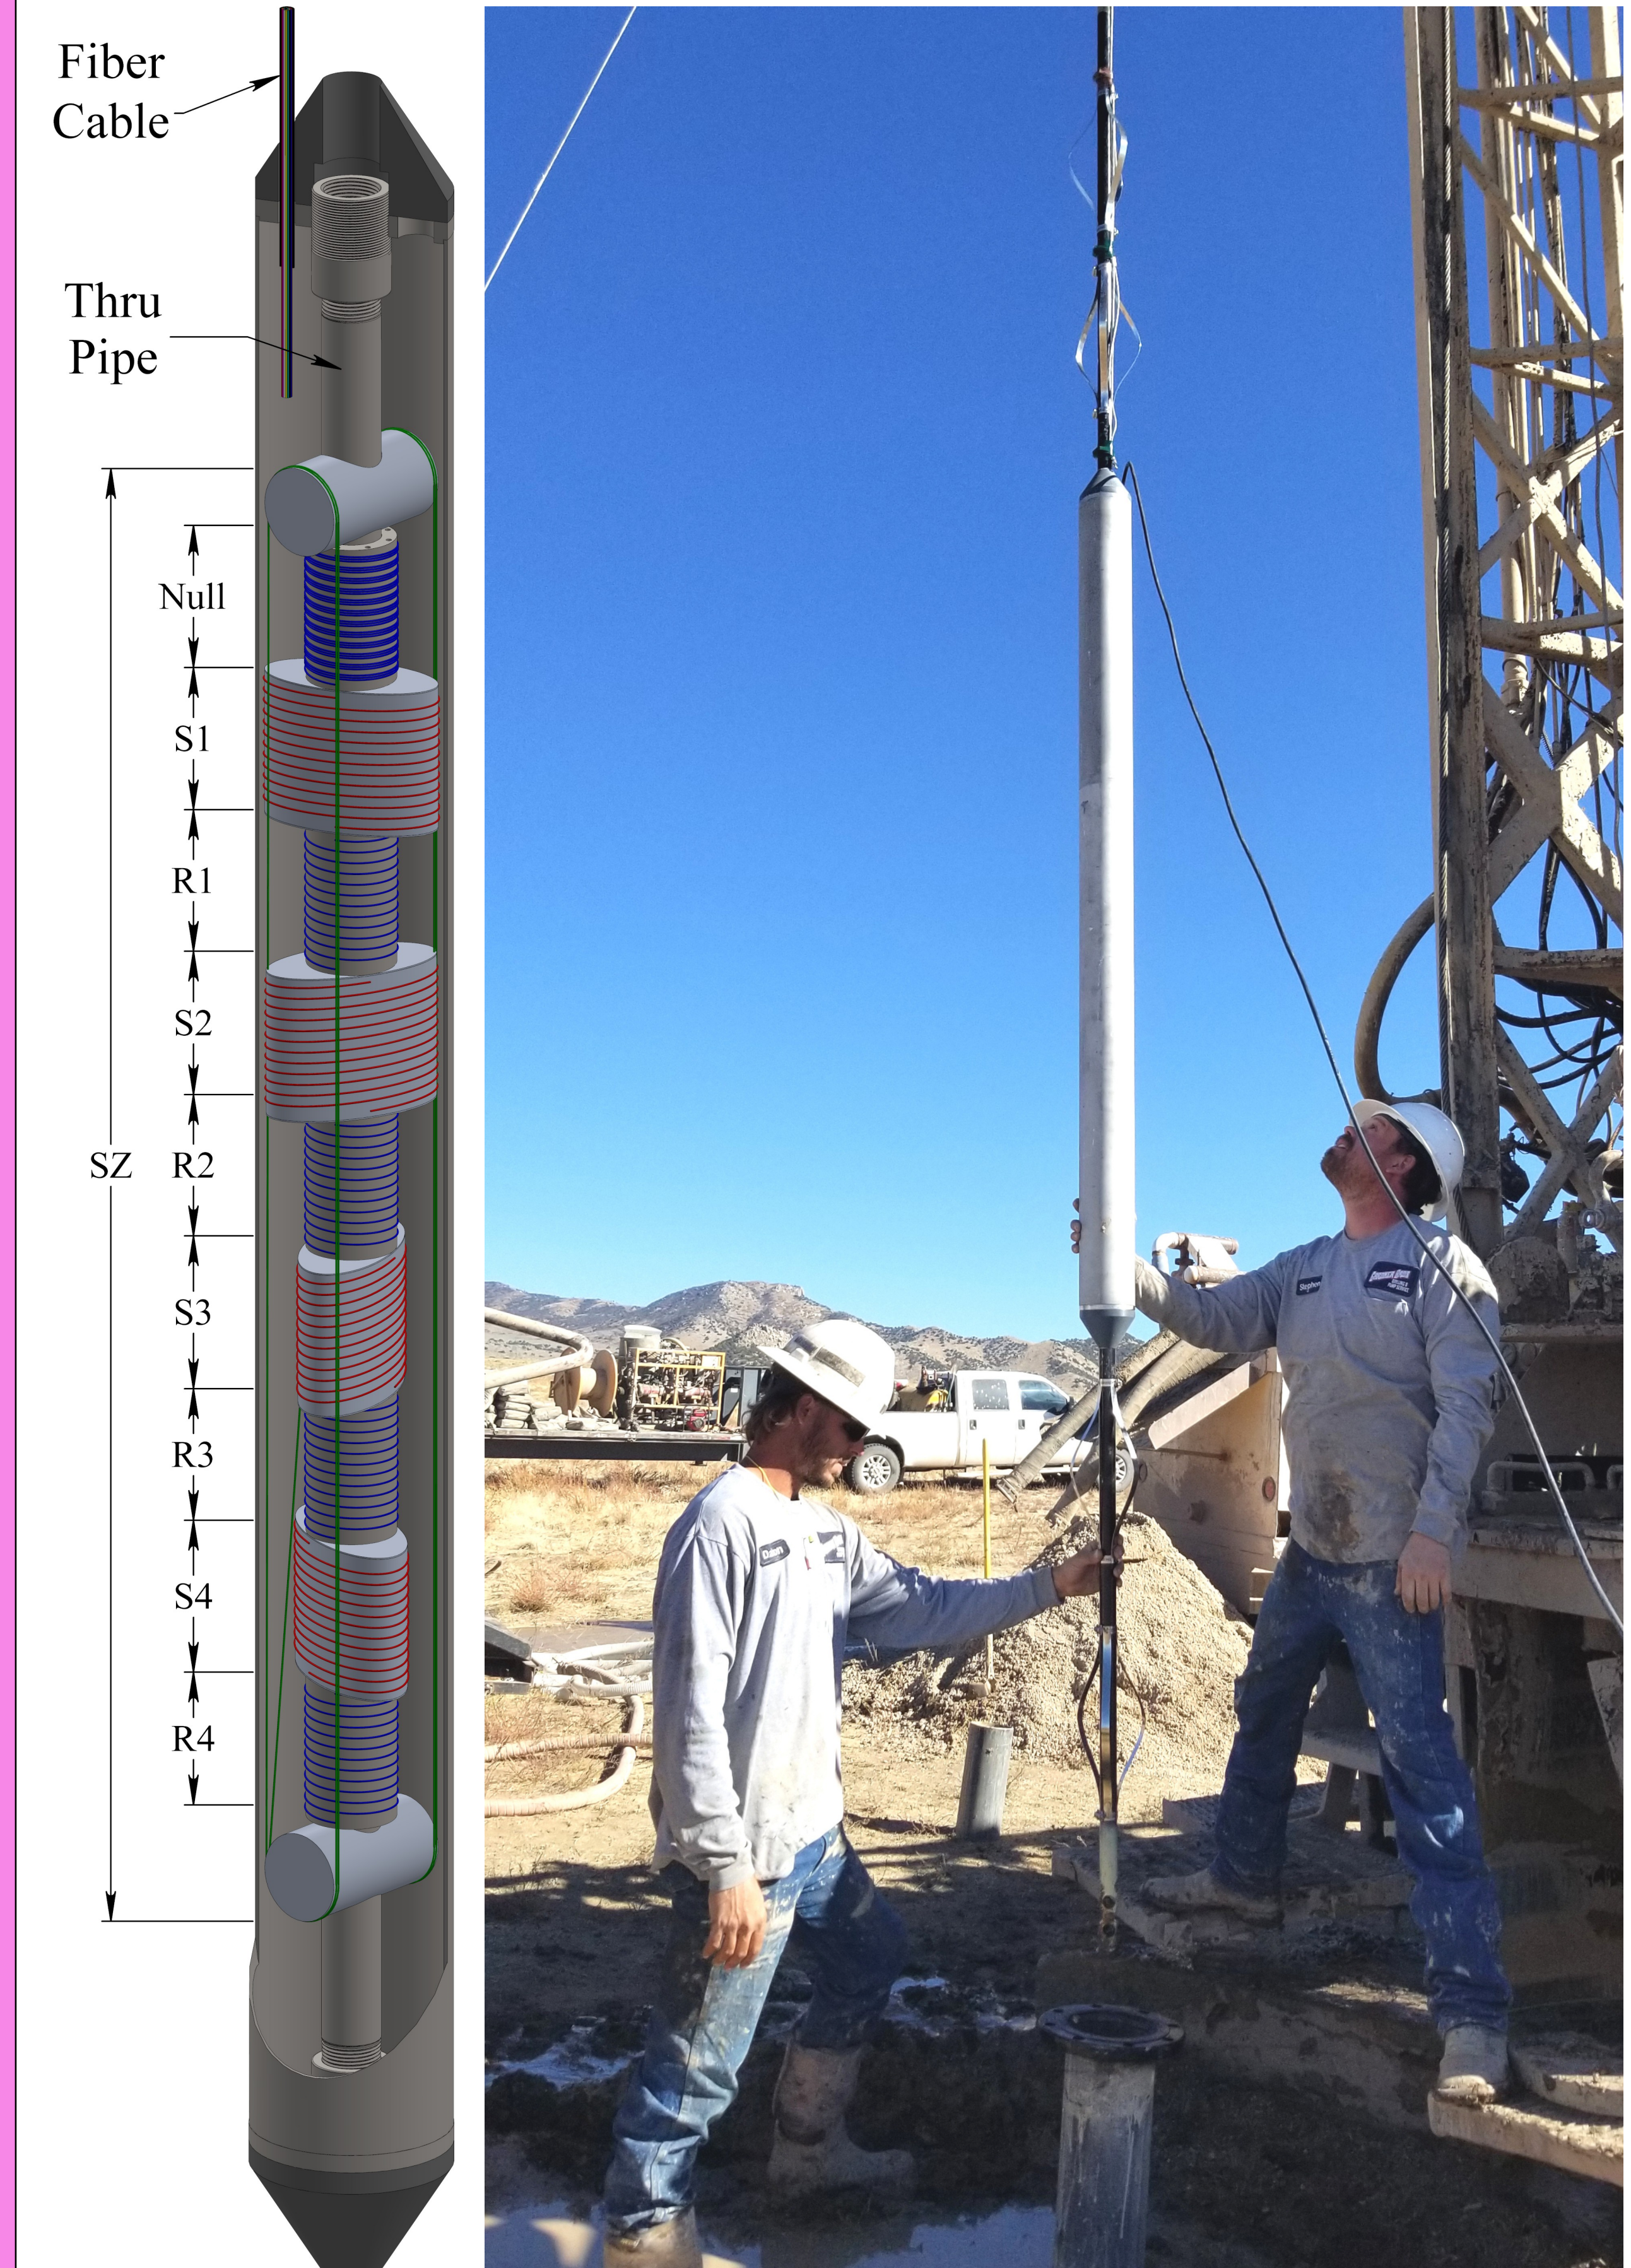



2. CO2 Injection Analog Site at the North Avant Field, Barnsdall, Oklahoma

We deployed an array of four new Tensor Sensors™ in March of 2022 at our Oklahoma demonstration site and successfully monitored water injections into a nearby well 9A as an analog to geologic carbon storage. This built on our existing infrastructure that includes a Gladwin Tensor Strainmeter at well AVN2. Three were deployed at ~40m in new wells, and one was deployed at reservoir depth (~530m) in an existing well drilled over 100 years ago (AVN31).

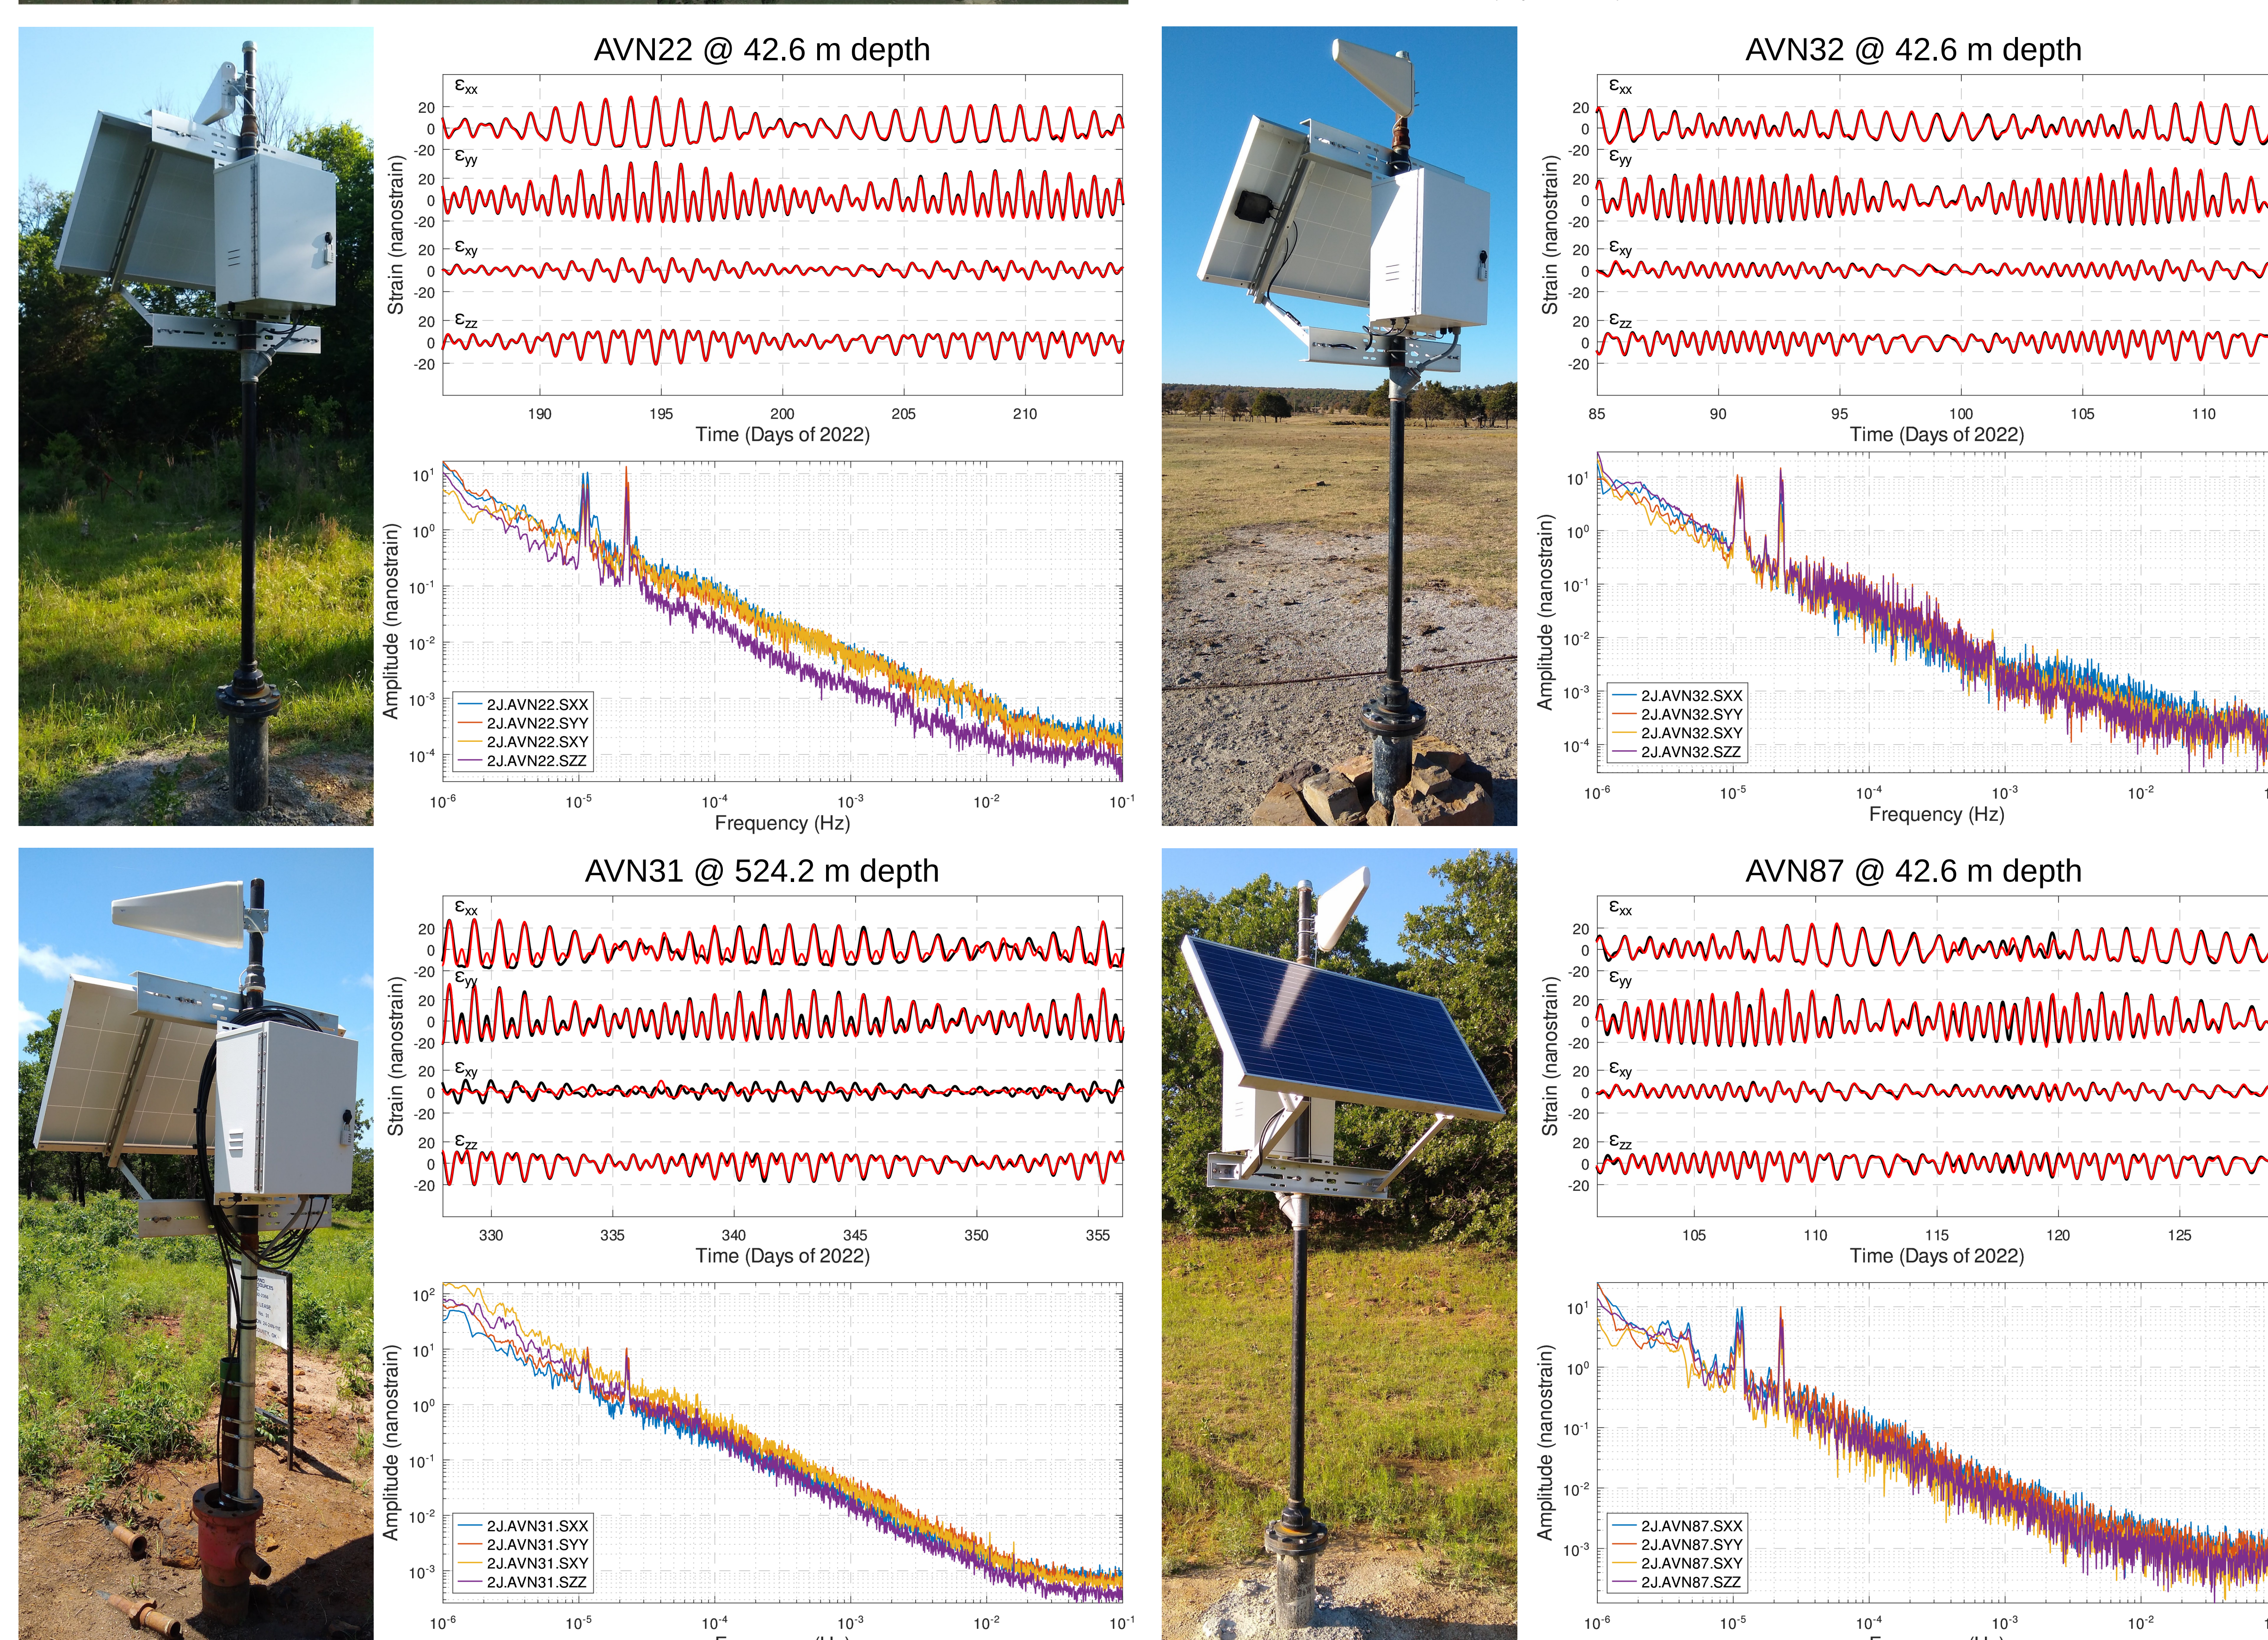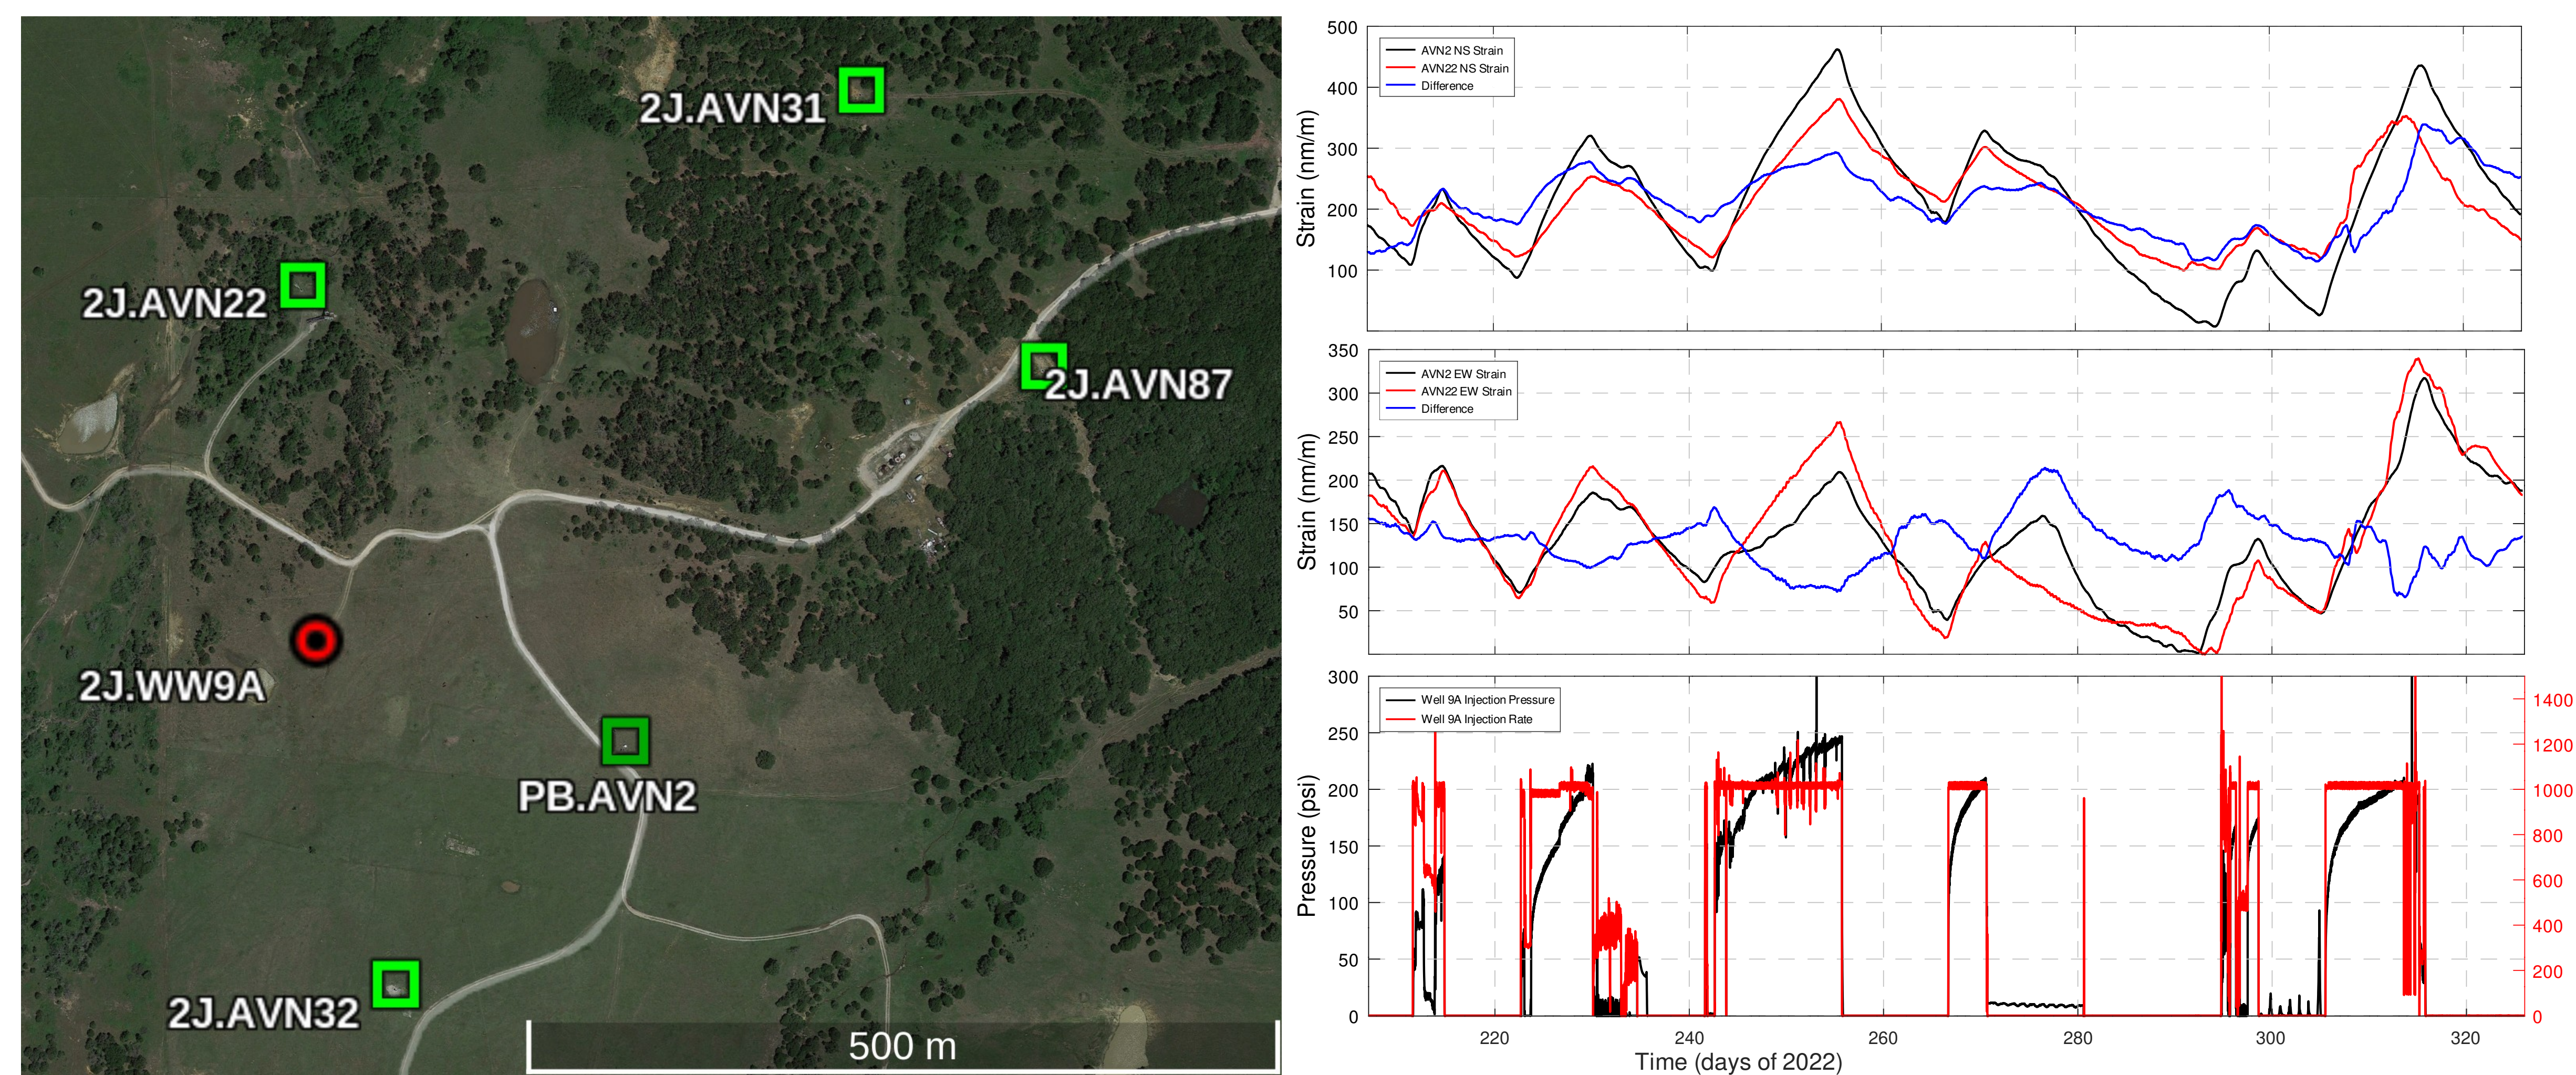

3. Frontier Observatory for Research in Geothermal Energy (FORGE) Facility, Milford, Utah

In February and October of 2022 we deployed an array of four new Tensor Sensors™ at the FORGE research facility to monitor strain changes from enhanced geothermal well operations. While the installations were successful, poor formation stability has prevented the detection of EGS signals.

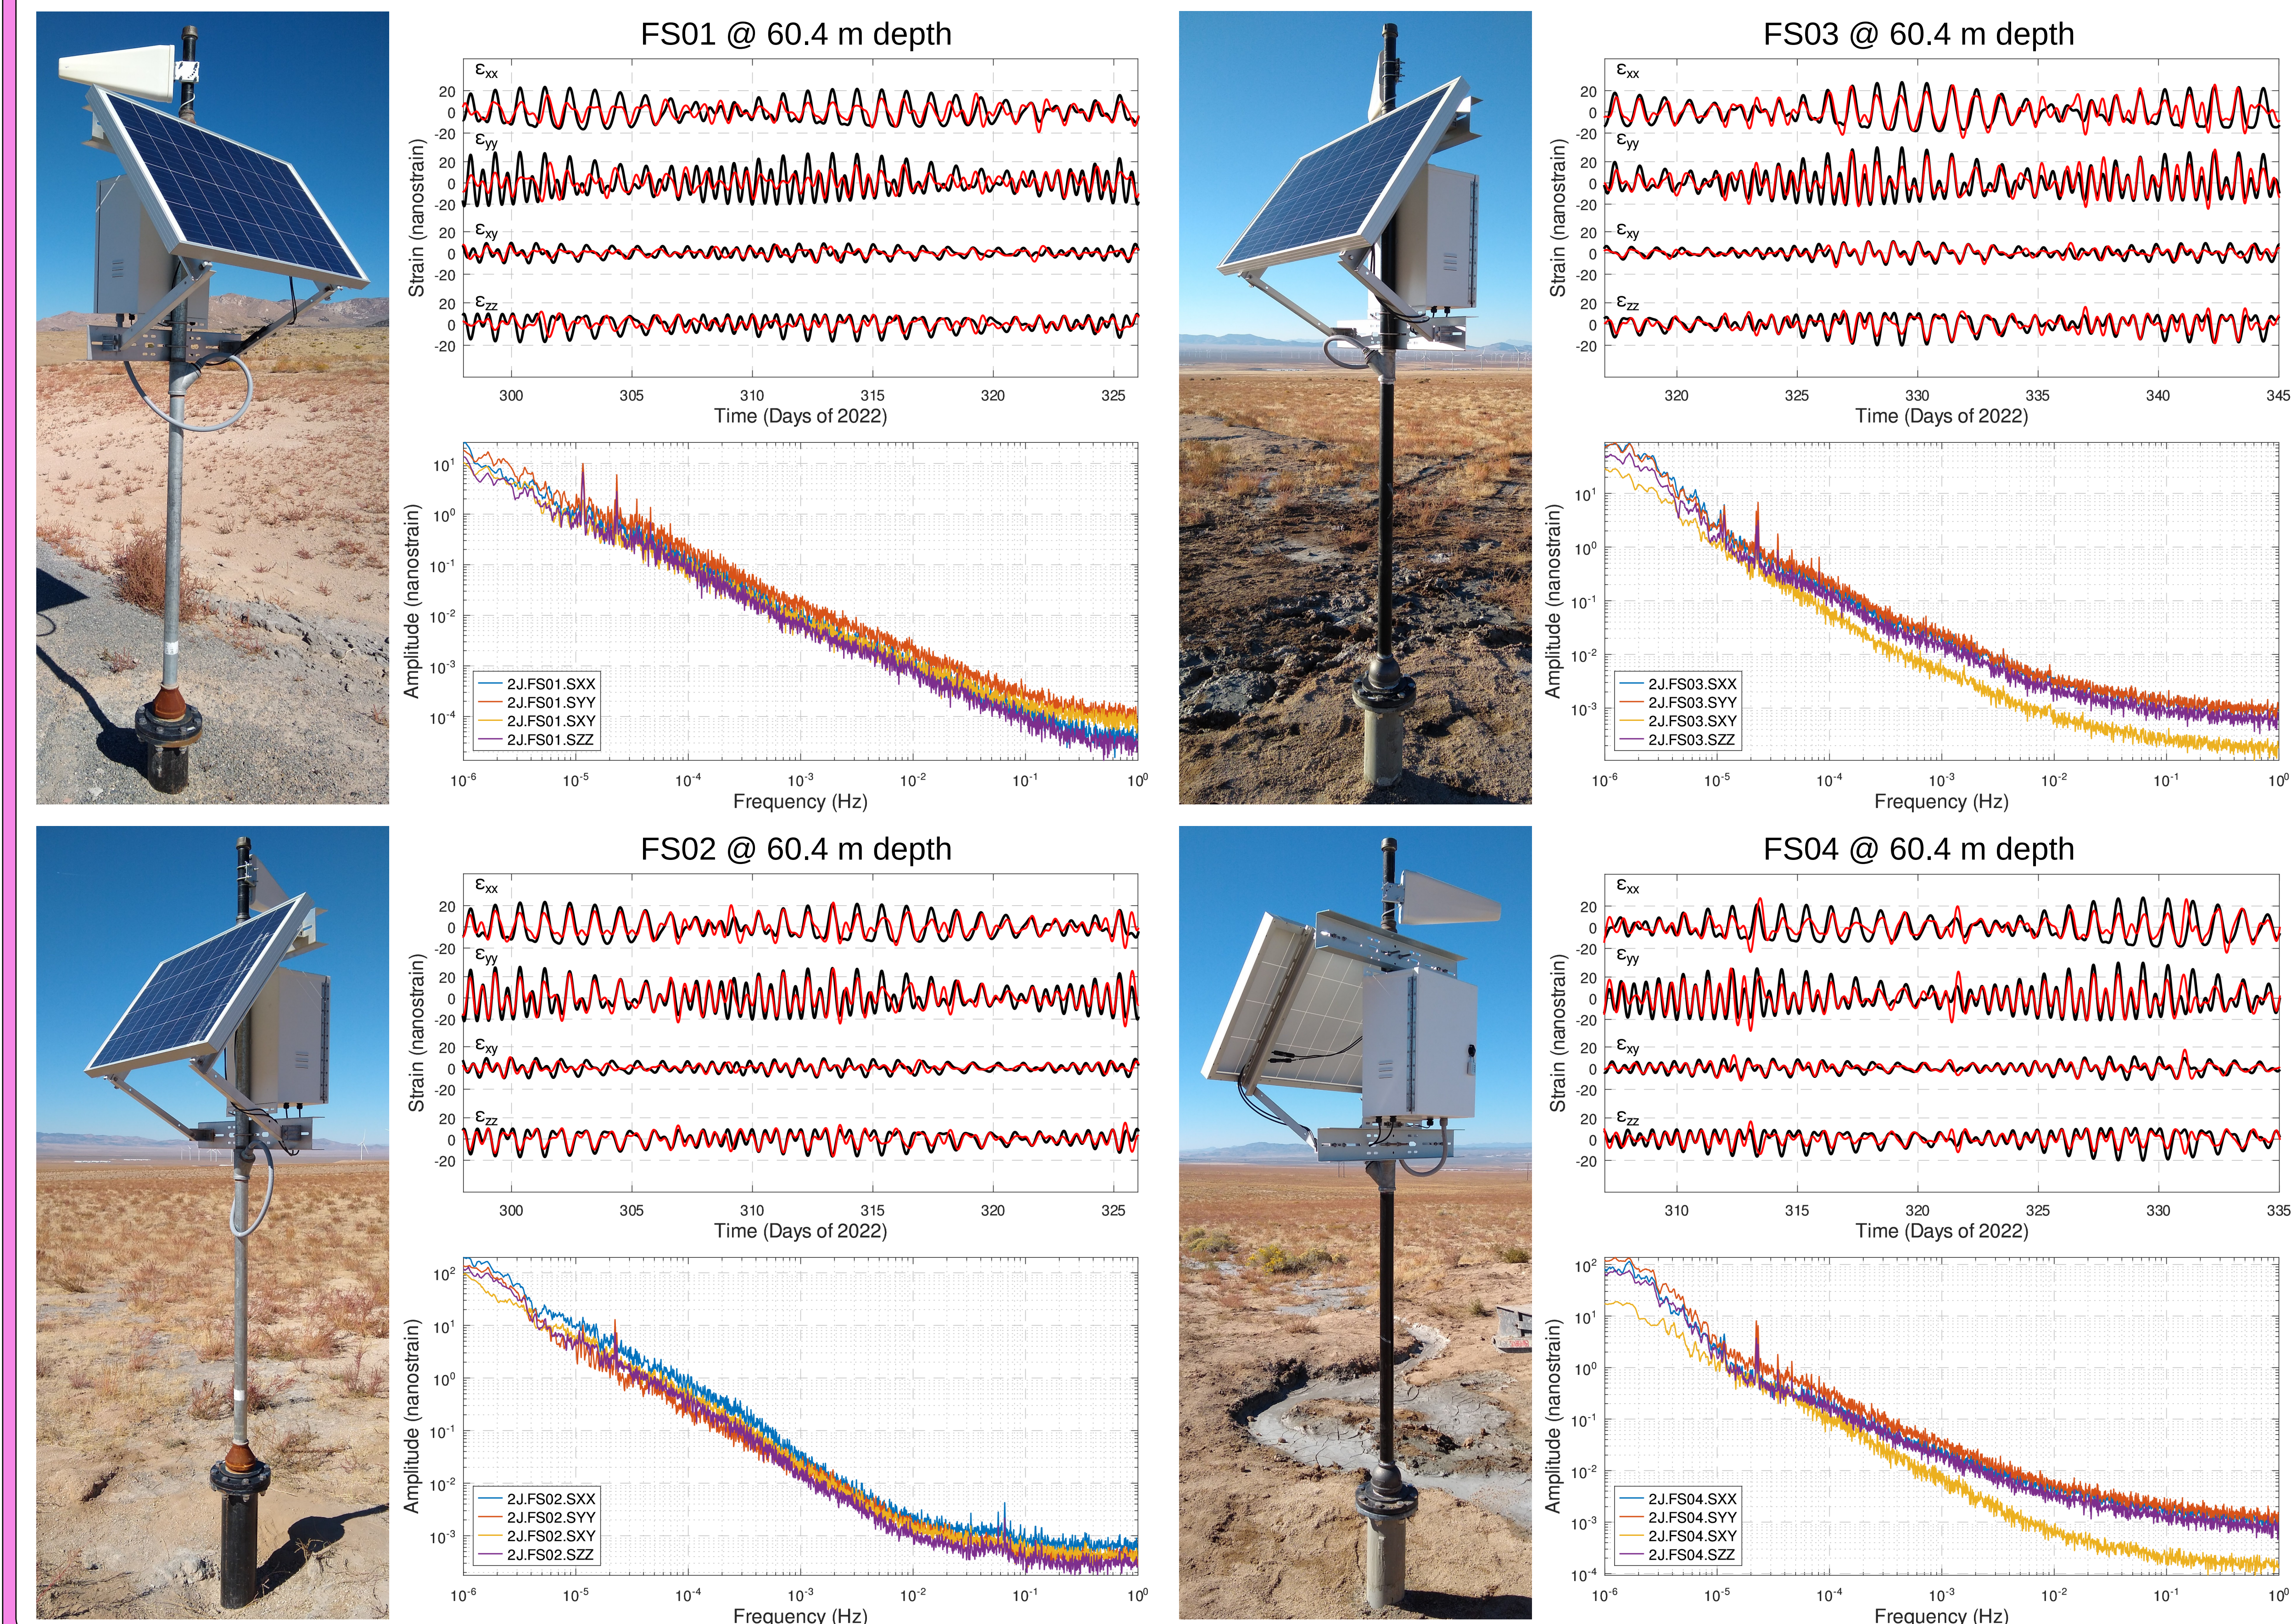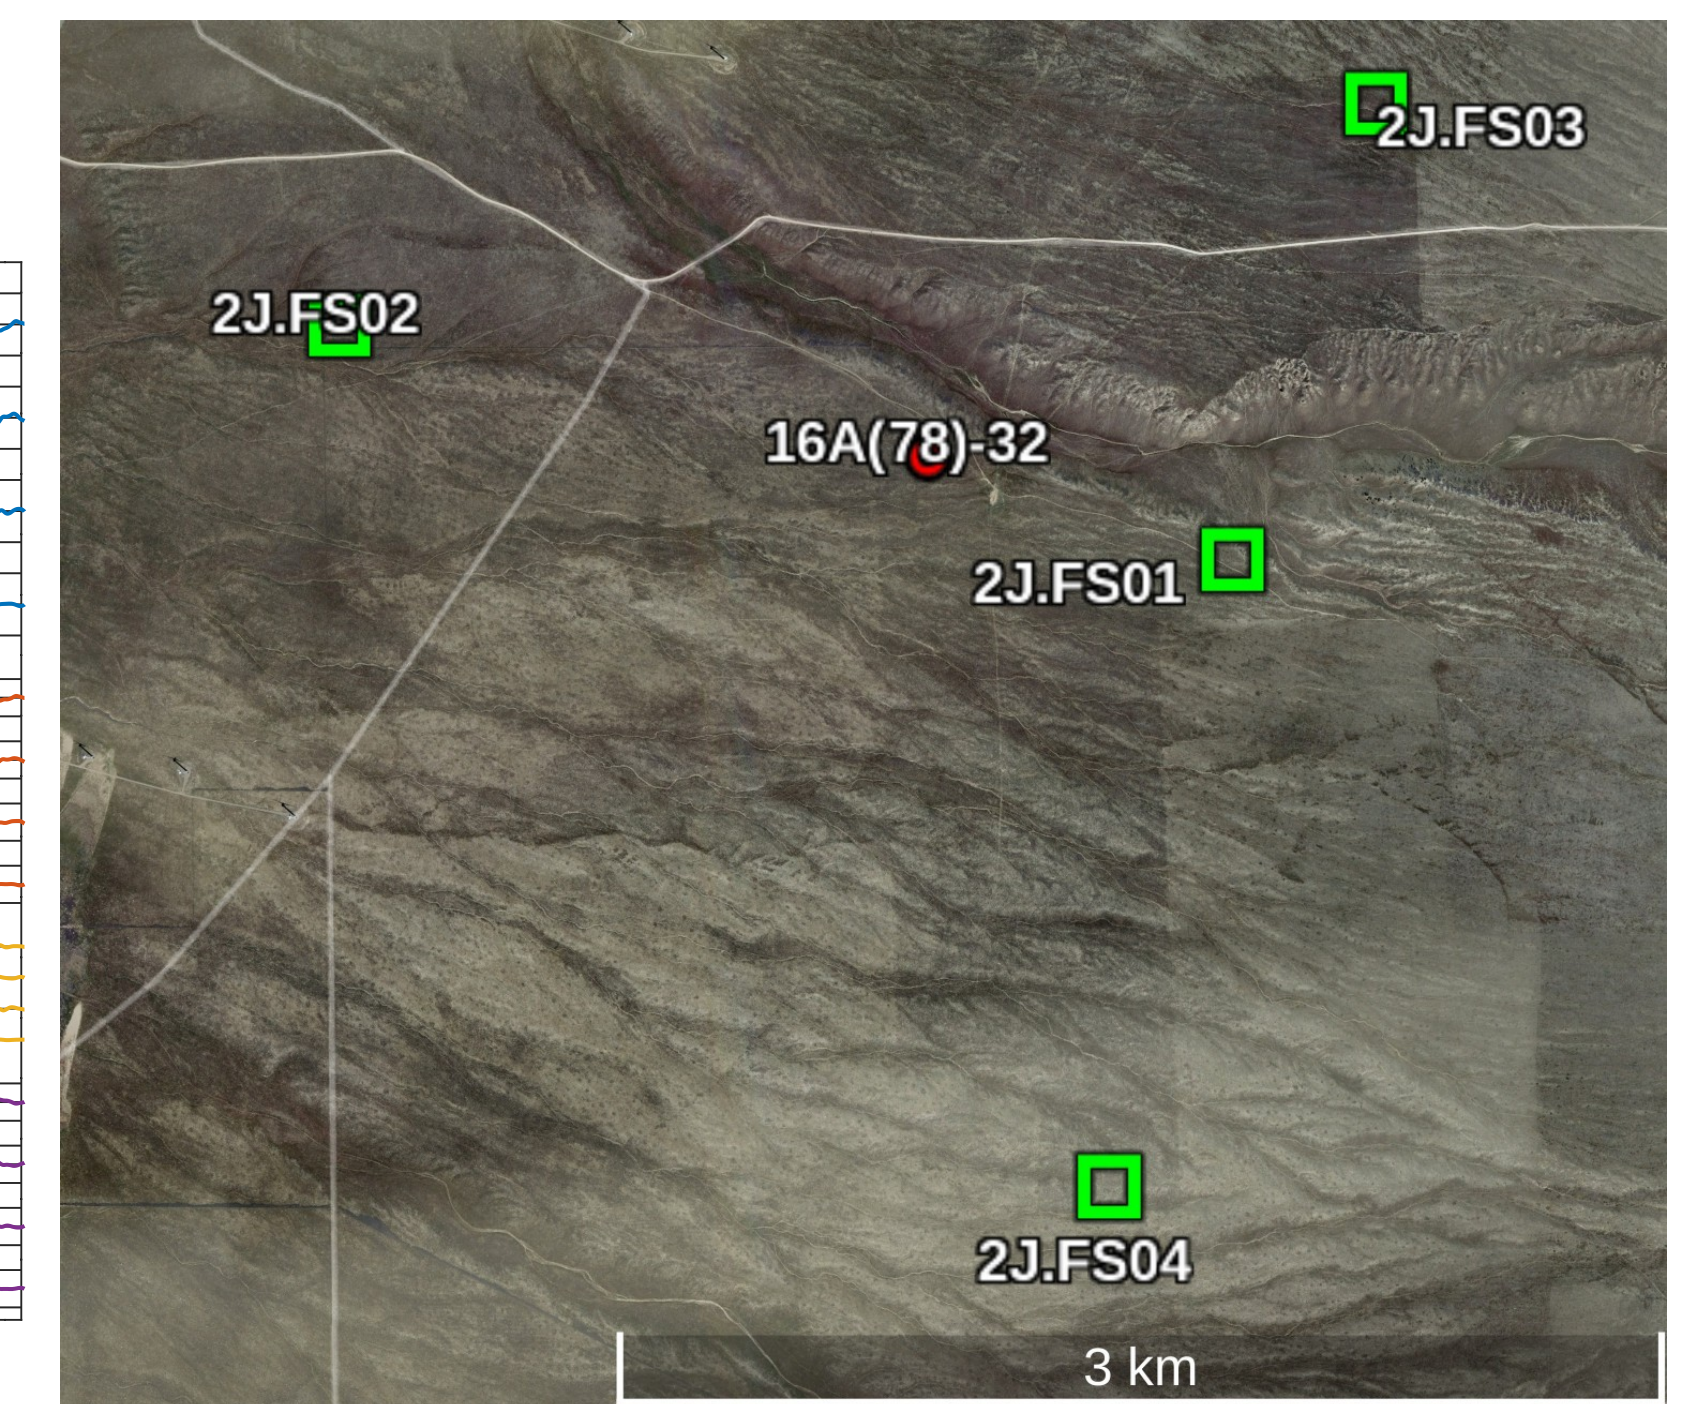

4. Conclusions

Two arrays of novel tensor optical fiber strainmeter were successfully deployed in Oklahoma and Utah

- Able to clearly measure tides, teleseisms and directional strains from subsurface fluid injections in Oklahoma
- Barely able to resolve the tides, but clear teleseisms in Utah
- Don't grout strainmeters into gravel



AKNOWLEDGEMENTS: The authors are grateful for the excellent work and service provided by Machining and Technical Services at Clemson University. We would also like to thank Marvin Robinowitz and Scott Robinowitz of Grand Resources; Rodney Merck, Rodney Morgan, Lori Alexander and Kim Thompson-Neptune of Clemson University.

This material is based upon work supported by the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) under Grant Number DE-FE0028292. This project is managed and administered by the Sequestration Division and funded by DOE/NETL and cost-sharing partners. This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any of its employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. References herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of the authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.