

Fabrice Ardhuin¹ and Marine De Carlo¹

¹Laboratoire d’Océanographie Physique et Spatiale (LOPS), Univ Brest, CNRS, IUEM

April 19, 2024

Along-track resolution and uncertainty of altimeter-derived wave height and sea level: re-defining the significant wave height in extreme storms

Marine De Carlo¹, Fabrice Ardhuin¹

¹Univ Brest, CNRS, Ifremer, IRD, Laboratoire d'Océanographie Physique et Spatiale (LOPS), IUEM,
F29280, Plouzané, France.

Key Points:

- Retracking of altimeter waveforms yields fluctuations in wave height and sea level, correlated at the scale of the effective footprint
- A good approximation for the effective footprint diameter is the square root of the product of wave height and satellite altitude
- An estimation of phenomenal wave heights precise to better than 2% requires filtering over wave groups, typically over a distance of 20 to 50 km

Corresponding author: Fabrice Ardhuin, fabrice.ardhuin@univ-brest.fr

Abstract

Satellite altimeters are the most common source of wave measurement in phenomenal sea states, with significant wave heights exceeding 14 m. Unfortunately their data is still considered with skepticism, because there is usually no other data to verify the accuracy of the largest values. Here we investigate the self-consistency of the measurement, and their small scale variability, in order to define an estimate of satellite altimeter precision. Using numerical simulations of ocean surfaces and the processing involved in satellite re-tracking, we find that wave groups are responsible for a variance in estimated altimeter wave heights that is proportional to the square of the spectral peakedness parameter and the significant wave height. Additional variance induced by speckle noise is proportional to the wave height. The effect of wave groups generally dominates in the most severe storms. This variability requires a relatively large scale smoothing or filtering to yield accurate wave height estimates. For example, the largest ever reported 1-second average significant wave height from altimeters sampled by Jason-2 in the North Atlantic in 2011, at $\bar{H}_s = 20.1$ m, is now interpreted to correspond to a true wave height $H_s = 18.5 \pm 0.3$ m. The difference between 20.1 m and 18.5 m is mostly due to wave group contributions to the raw measurement. We argue that wave group effects should not be included in the definition of the significant wave height, just like the maximum wave height differs from the significant wave height.

Plain Language Summary

Over most of the past 30 years, satellite altimeters have been the only means to measure wave properties in the most severe ocean storms. How do we know that these data are trustworthy, and how can we define uncertainties? Here we show that as a satellite flies along its orbit, it reports wave height that fluctuate because of the random nature of the wave field that can be organized in groups at the scale of a few kilometers. We are able to simulate the precision of the measurements, as a function of the wave height and the degree of organization of the wave field, measured by a "spectral peakedness" parameter. This novel understanding can be used to define the precision of the measurements. For example, as far as we know, the largest reported value for a 1 second averaged satellite measurement of the significant wave height was $\bar{H}_s = 20.1$ m in a 2011 North Atlantic Storm, with no precision given. We can now re-interpret this data as evidence of a true significant wave height $H_s = 18.5 \pm 0.3$ m. The local fluctuations up to 20 m are caused by wave groups and should not be counted in the significant wave height.

Keywords: Wave groups, altimetry, storm

1 Introduction

Satellite altimeters have been used over the past 30 years to measure sea level (Cazenave et al., 2018) and sea states (Ardhuin, Stopa, et al., 2019). These measurements are based on the estimated distances between a radar and the scattering elements at the sea surface, with a 'local average' related to the sea level and a 'local standard deviation' related to the significant wave height. This separation was understood well enough for most applications, but new instruments able to resolve shorter and shorter scales make it more important to clarify how the multi-scale ocean surface elevations and velocities contribute to the parameters estimated from altimeter data. In particular we explore the link between the underlying significant wave height, the 'local standard deviation' of the surface elevation and the altimeter measurements.

Our goal in this paper is to build a model for the small scale fluctuations in wave height estimates, given below by eqs. (22)–(23). We apply this model to propose an uncertainty for altimeter measurements of large significant wave heights ($H_s > 8$ m) for

which too few validation data exist (Dodet et al., 2020). Understanding these fluctuations is also relevant in the context of recent efforts to improve instruments and data processing techniques to provide the highest possible resolution, in particular for coastal areas (Vignudelli et al., 2018; Passaro et al., 2021). The variability of sea level and H_s estimates is generally well understood at scales larger than 30 km, where geostrophic currents and their effect on wave heights dominate (Morrow & Le Traon, 2012; Ardhuin et al., 2017). Extending this understanding toward high resolution requires a detailed analysis of the measurement system. The present paper extends the previous analysis by De Carlo et al. (2023), hereinafter DC23, with a particular emphasis on the correlation properties of the measured data.

The fundamental measurement of an altimeter is the power received from sea echoes as a function of delay time t , known as the waveform (Brown, 1977). In practice the time separation is not perfect and some blurring in time is caused by the finite frequency bandwidth of the radar, so that the measured waveform is a convolution of the true waveform and the instrument point target response (PTR). Example of waveforms from the China-France Ocean Satellite (CFOSAT) are shown in Fig. 1. They correspond to the same average significant wave height, around 9.3 m, but very different sea states, as quantified by their spectral peakedness Q_{kk} , a parameter defined below, with a young wind sea on the left and a mature swell on the right. The method used to estimate sea level and wave height uses the fit of a theoretical waveform shape to the measured waveform. That theoretical shape is also, but not only, a function of sea level and wave height.

A well known source of deviations from the theoretical shape is the purely instrumental effect of ‘speckle noise’ which comes from Rayleigh fading: this noise is present when the propagation paths between the radar and individual scattering elements at the ocean surface have lengths that spread over a range much larger than the radar wavelength (Quartly et al., 2001). In both panels of Fig. 1, speckle noise explains the fluctuations for range gates indices larger than 110: on average, for half of the range gates one waveform (out of 50) should exceed the upper dashed line and one should fall below the lower dashed line.

Another well known source of deviations from the theoretical waveform is the effect of ocean backscatter variability within the radar footprint, which is very important for wind speeds under 3 m/s (Dibarboure et al., 2014), and in the presence of sea ice (Tourain et al., 2021). Both speckle noise and backscatter variability have been cited as the possible source of noise in the estimation of wave height and sea level, and Sandwell and Smith (2005) have explained the resulting correlation of these two retracked parameters. The observed correlation can be used empirically to reduce the noise in sea level estimates (Zaron & DeCarvalho, 2016; Quartly et al., 2019).

Here we find correlations of along-track variations of parameters, shown in Fig. 2, that are consistent with previous studies, but with much larger relative fluctuations of both wave height and sea level estimates. We will show that this magnitude is specific to sea states with large wavelengths and narrow spectra, an effect that can uniquely explain why the waveforms in the two panels of Fig. 1 differ so much for range gate indices 85 to 100. In fact, a much less researched source of deviations between measured waveforms and parametric models, is the non-uniform statistical distribution of the elevation of sea surface scatterers at the scale of the “instrument footprint” (to be precisely defined below). The first study of that effect was published by DC23, with the main results summarized at the beginning of section 2. The waveforms in Fig. 1.a are consistent with the assumption of uniform wave heights across the footprint that was used to derive parametric theoretical waveforms, whereas in Fig. 1.b the waveforms are more different from the theoretical shape, which is typical of non-uniform conditions. Fitting these different waveforms with the theoretical shape gives wild variations of the wave height estimate \hat{H}_s , shown in Fig. 2.a, that may not be realistic, and even wilder variations of the sea level anomaly in Fig. 2.b, with differences up to 1.8 m for measurements only

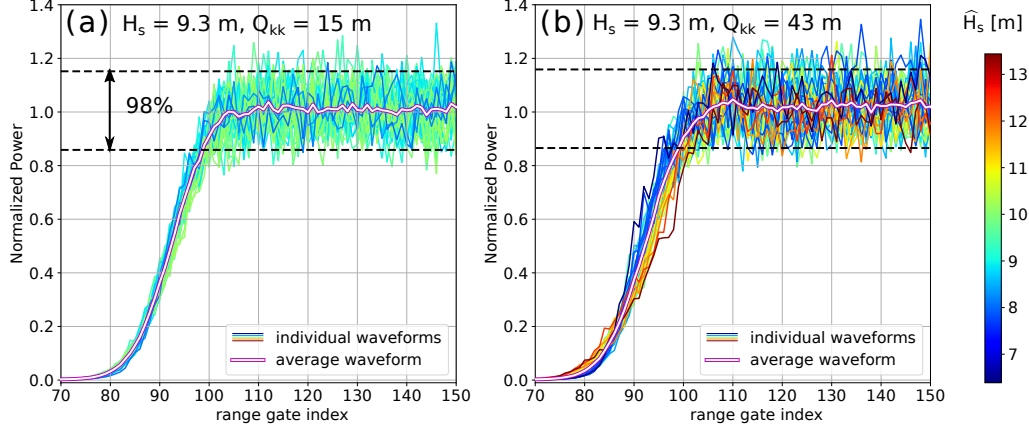


Figure 1. Two groups of 50 consecutive CFOSAT/SWIM nadir waveforms spanning 11 seconds each (i.e. a distance of 75 km along-track), individual waveforms are color-coded with the estimated wave height \hat{H}_s . Both groups were acquired along the same descending orbit in the North Atlantic on February 14th 2020 around 9:10 UTC, on the edges of storm Dennis (a) around 61.5° N and (b) around 44.5° N. These are the echo_L1A variable, already corrected for the antenna pattern, and normalized by the estimated Level 2 Normalized Radar Cross Section. The white line represents the average waveform. The horizontal dashed lines represent the 98% confidence interval expected for random fluctuations due to speckle, assuming that 264 independent radar pulses are averaged for each range gate.

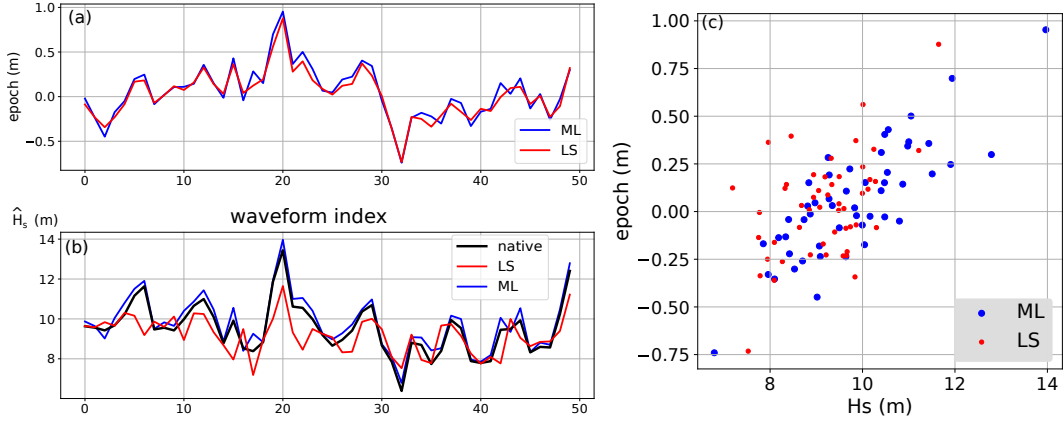


Figure 2. Estimates of the (a) epoch and (b) wave heights for the 50 waveforms of Fig. 1.b, using two different cost functions: "LS" is a least squares 2-parameter fit to the theoretical waveform given by eq. (A17) with $a = b = \xi = 0$, $\gamma = 1$ and "ML" is a maximum likelihood 2-parameter fit to the same theoretical waveform. The "native" data is shown for reference and is the operational method as described in Tourain et al. (2021). The good agreement of the "ML" retracking with the "native" data requires to ignore the first range gates using $k_{\min} \simeq 80$, or adapting k_{\min} such that $S(k_{\min}) > r_{\min} \max(S)$, with $r_{\min} \simeq 0.06$.

116
117

19 km apart. This sharp gradient in that region of the ocean is clearly not realistic and can be a spurious effect of the violated elevation uniformity assumption.

In section 2 we provide a basis for the understanding of perturbation of altimeter measurement associate to wave groups. This extend the approach of DC23 to more realistic representation of altimeter waveforms. Section 3 builds the uncertainty model, starting from the uncertainty of individual measurements and, after defining the relevant along-track correlation scales, defining an uncertainty for along-track averages. These effects are illustrated using simulated waveforms for the sea state conditions with strong wave groups corresponding to Fig. 1.b. The contribution of wave groups is a simple function of H_s , Q_{kk} , and instrument parameters. The same method can be applied to sea level fluctuations. This theoretical model is verified in section 4 using simulated waveforms corresponding to all combinations of H_s and Q_{kk} that may be found in the global ocean. This model is then applied to the estimation of H_s uncertainty from a sequence of \hat{H}_s estimates obtained from individual waveforms. Summary and conclusions follow in section 5.

2 Waveforms and their retracking over wave height gradients

Here we extend the work of DC23 who neglected the Earth sphericity, assumed a broad antenna pattern and neglected effects of the PTR and of speckle noise. We relax these assumptions and investigate the influence of the choice of the cost function. We provide analytical derivations of the forward model (a generalized parametric waveform) with details in Appendix A. We emphasize that this parametric waveform was not designed for retracking, but rather to guide the interpretation of existing datasets that are the results of retracking with the usual Brown waveform. Indeed the inverse modelling (the retracking) could be done analytically in the case of DC23. For the generalized waveform the analytical retracking may not be feasible but for cost functions based on least-squares the retracked wave height and sea level can still be expressed as functions of anomalies of the wave height field.

2.1 Footprints


The "radar footprint" is the region of the ocean that produces backscatter from a radar single pulse, and depends on the antenna aperture, satellite altitude h and Earth radius R_E . In the case of the nadir beam on SWIM, this is typically a disc of radius 9.5 km centered on the nadir, where we have defined the footprint boundary as the location where the backscattered power drops to half the peak power at nadir. There are notable exceptions with strongly reflecting surfaces at high elevations above sea level (land or icebergs) that may corrupt the measurements even if they are further than 9.5 km from nadir. When we exclude these exceptional cases, the measurements are mostly sensitive to an area much smaller than the radar footprint. For those altimeters that only measure power as a function of time delay, Chelton et al. (1989) have argued that the estimates \hat{H}_s for wave height and \hat{z}_e for sea level are associated to the true physical values of the significant wave height H_s and sea level z_e within an "oceanographic footprint" which they defined to be a disc of radius

$$\rho_C = \sqrt{2h(H_s + \delta_R)/(1 + h/R_E)}, \quad (1)$$

where the range resolution $\delta_R = c/(2B)$ is defined by the radar bandwidth B and the speed of light c . So far, all altimeters that use a Ku-band frequency have used $B = 320$ MHz giving $\delta_R = 0.47$ m so that the minimum radius ρ_C , corresponding to the lowest sea states, is of the order of 1 km. For a very large sea state with $H_s = 9$ m and the relatively low orbit height of 519 km of CFOSAT, one gets $\rho_C = 3.1$ km.

However, that estimate turns out to be very conservative. Data from the SWIM instrument on CFOSAT occasionally shows variations in \hat{H}_s between consecutive measurements separated by only 1.7 km, for example in Fig. 2. So what is the effective diameter of the footprint of a satellite altimeter? In the following we will show that, when

Non-uniform wave heights occur even in homogeneous sea states represented by a single wave spectrum, due to the interference of wave trains with different frequencies and directions. This interference produces series of high waves known as wave groups (Arhan & Ezraty, 1978). We will therefore call this particular non-homogeneity the "wave group effect". It is present for all sea states, albeit with different magnitudes. The most simple form of wave groups is shown in Fig. 3 with the sum of two monochromatic wave trains, of wavenumbers k_1 and k_2 forming a beating pattern. It is obvious that waveforms obtained at times t_1 and t_2 are different: at t_1 the first echoes correspond to the distance $h - a$ whereas at t_2 the first echoes arrive later and correspond almost to h . As a result, the corresponding wave height estimates \hat{H}_s differ by a factor 10, even though the sea state is "spatially homogeneous", in the sense that the corresponding wave spectrum and associated parameters, including the underlying significant wave height H_s , are constant.

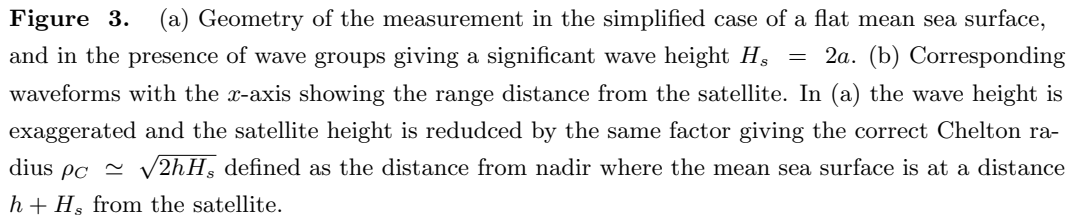

–6–

From the envelope η , obtained from the analytical form of the surface elevation (see DC23 for details), we defined a local wave height

$$H_l = 4\sqrt{2/\pi} \times \eta, \quad (2)$$

with a scaling a little different from Janssen (2014) so that the large-scale average of H_l is the usual significant wave height defined from the average of the surface elevation variance $\langle H_l \rangle = H_s = 4\sqrt{\langle \zeta^2 \rangle}$. More specifically, the Power Spectral Density (PSD) of the envelope, and thus the PSD of the local wave height H_l , is proportional to the convolution of the double-sided wave spectrum $E(k_x, k_y)$ by itself (Tayfun & Lo, 1989). In particular, for a Gaussian wave spectrum, the envelope spectrum is also a Gaussian, but centered on $\mathbf{K} = \mathbf{0}$, as detailed in DC23.

When concerned about fluctuations of the wave height H_l filtered at scales much larger than the dominant wave groups, one can approximate the PSD of H_l as a constant, and obtain the variance of H_l as the value of the H_l PSD at $\mathbf{K} = \mathbf{0}$ times the spectral integral of the filter response Δ_k^2 . DC23 showed that this gives the following variance associated to wave groups

$$\text{var}_{\text{wg}}(H_l) = (4 - \pi)H_s^2 Q_{kk}^2 \Delta_k^2, \quad (3)$$

where they have defined the spectral peakdness as

$$Q_{kk}^2 = \frac{\iint_{\mathbb{R}^2} E^2(k_x, k_y) dk_x dk_y}{\left(\iint_{\mathbb{R}^2} E(k_x, k_y) dk_x dk_y\right)^2}. \quad (4)$$

The link between these properties and altimeter data was made explicit by DC23 who showed that the output of the simplest 2-parameter (wave height and sea level) altimeter retracker can be expressed analytically as a spatial filter of the H_l field.

2.3 Definitions of retracking cost functions

In the following, we will fit the measured or simulated waveform (y_k) with a parametric form (s_k), for all range gate indices k between k_{\min} and k_{\max} . One possibility is to use a least square cost function

$$C_{\text{LS}} = \sum_{k=k_{\min}}^{k_{\max}} w(k)(y_k - s_k)^2 \quad (5)$$

with the default weights w set to 1 for all k . This is used in the very common so-called "3- or 4-parameters Maximum Likelihood Estimator" (MLE3/MLE4). In the present context a better name for these would be LS3 and LS4, with the 3 fitted parameters being \hat{H}_s , \hat{z}_e , and the normalized radar cross section $\hat{\sigma}_0$, and the fourth power is generally the antenna mispointing angle (Schlembach et al., 2020).

We may also use a maximum likelihood (ML) fit, first introduced by Rodriguez (1988) and particularly developed for the ERS-1 altimeter by Challenor and Srokosz (1989). ML is the optimal method for a uniform sea state with fluctuations in the waveforms dominated by speckle noise. In the limit of a large number of looks it takes the following form,

$$C_{\text{ML}} = \sum_{k=k_{\min}}^{k_{\max}} \frac{y_k + \varepsilon}{s_k + \varepsilon} - \log \left(\frac{y_k + \varepsilon}{s_k + \varepsilon} \right), \quad (6)$$

where we have introduced $\varepsilon = 10^{-5}$ to reduce the influence of numerical errors. We also define k_{\min} to be the highest index such that

$$S(k_{\min}) > r_{\min} \max(y_k). \quad (7)$$

The ML-type cost function is used in the "adaptive" method used to produce the "native" CFOSAT data (Tourain et al., 2021), but it is not clear which are the actual range gates used in practice. Although we initially used $r_{\min} = 0$, we found a generally good agreement with the native CFOSAT data when using $r_{\min} = 0.06$. In the example on Fig. 5.B,D, using $r_{\min} = 0.06$ corresponds to fitting only the part of the waveform that is above the horizontal dashed line. More details on the sensitivity of results to the value of r_{\min} are given in Appendix C. An intermediate cost function is given by the minimum mean square estimator (MMSE) approximation to the ML cost function (Zanifé et al., 2013), that gives a weighted least square cost function with much larger weights $w(k)$ for the early part of the waveform, such as used in the WHALES retracker (Schlembach et al., 2020).

Taking the waveforms of Fig. 1.b as an example, LS-based retracking has less variability than the ML-based result, their mean values differ by 27 cm, and both retrackers give a strong correlation between epoch and H_s anomalies, shown in Fig. 2.b. Using simulated sea surfaces and altimeter waveforms (see details in Appendix B for the simulation method), we will show that this example is actually representative of large sea states with narrow wave spectra. In these cases speckle noise is a less important source of waveform deviations than the wave group effect, and ML-based retrackers are not optimal.

2.4 Wave height gradient effect on waveforms: beyond DC23

Following DC23, we start by deriving an analytical perturbed waveform in the presence of an unrealistic localized anomaly in surface elevation. This is detailed in Appendix A. Our anomaly consists of a change in significant wave height H_s , defined as 4 times the standard deviation of the surface elevation, from a background value H_s to an anomalous value $H_s(1+\Delta)$ over an area A_0 centered at the distance from nadir ρ_0 . Both the normal and anomalous sea levels are taken to be Gaussian distributed. The distance from nadir ρ_0 correspond to a distance $h+R_0$ from the altimeter at the mean sea level. The wave height anomaly can be localized or distributed over a ring, as shown in Fig. 4. More realistically, the anomaly is the ring-average of the true local wave heights H_l for the distance ρ_0 . After dealing with the kind of anomalies represented in Fig. 4, we will consider the superposition of all the distributions at all the distances from nadir. Those anomalies can be caused by wave groups but also by many other processes (wave breaking over a coral reef, dissipation over a mud bank, wave-current interactions ...). We define the

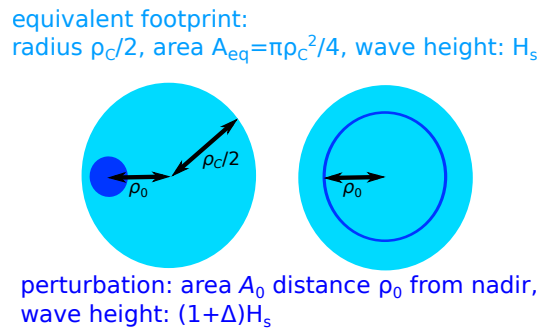


Figure 4. Schematic of idealized sea surface anomalies located at a given distance ρ_0 . This distribution is obviously impossible to obtain with real waves: a real wave field will have a smoothly varying distribution of H_l as a function of ρ .

equivalent footprint area $A_e = \pi h H_s (1+h/R_E)/2$, and find that the local wave height anomaly adds a perturbation to the usual waveforms, as given by eq. (A10) and (A17).

The two adimensional parameters that define magnitude and location of the perturbation are

$$a = \Delta \frac{2A_0}{\pi h H_s / (1 + h/R_E)} = \Delta \frac{A_0}{A_{eq}} \quad (8)$$

$$b = \frac{R_0}{H_s} = \frac{\rho_0^2}{2h H_s (1 + h/R_E)} \simeq (\rho_0/\rho_C)^2. \quad (9)$$

One example of this theoretical perturbed waveforms is shown in Fig. 5 for $a = 0.3$ and $b = 0$, compared to the unperturbed Brown waveform plotted with a dashed line, and different attempts at fitting it with a Brown waveform. Taking into account

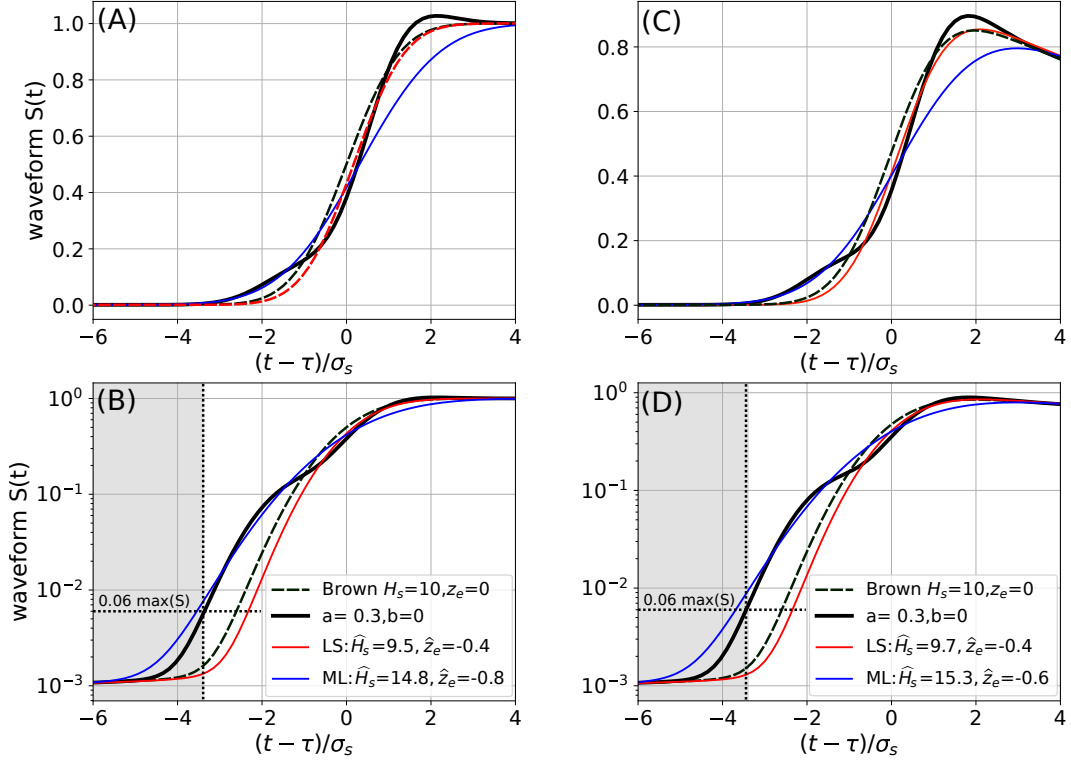


Figure 5. Example of theoretical perturbed waveforms based on eq. (A17) for $H_s = 10$ m, $\tau = 0$, $\xi = 0$, $N_t = 0.001$, $a = 0.3$ and $b = 0$ and its comparison to unperturbed waveforms with $a = 0$. The x axis is the delay time normalized by $\sigma_s = 2H_s/c$. Left panels (A,B) are obtained in the limit of very broad antenna pattern, and (C,D) correspond to the real SWIM antenna pattern with $\theta_{3dB} = 1.6^\circ$. The bottom panels (B,D) correspond to the same waveforms but plotted with a logarithmic y axis, and the shaded area is ignored in the ML fit using $r_{min} = 0.06$. All waveforms use the PTR given by eq. (A16).

the full complexity of the waveform (right panels) does not change the qualitative impact on the simplest possible waveforms (left panels) used in DC23. In our example perturbation, $a > 0$ means that the wave heights are locally higher, which tends to shift some of the echoes to shorter and larger ranges: the black curve is higher than the dashed curve for $|t - \tau| \simeq 2\sigma_s$.

We have plotted the waveforms using both linear (top panels) and logarithmic (bottom panels) coordinates to illustrate the fact that the Maximum Likelihood cost function uses ratios instead of differences and gives a better fit in logarithmic coordinates.

When $b = 0$, our perturbed waveform is identical to the waveform for a uniform but non-Gaussian skewed surface elevation distribution, with skewness parameter $\lambda_{3,0,0} = 6a$ (Hayne, 1980; Srokosz, 1986). Although $a = 0.3$ is a fairly large but not impossible wave group effect, it would correspond to an impossibly large $\lambda = 1.8$. Hence the wave group effect can be locally much larger than the skewness effect. We note that the spurious perturbations on the sea level estimate \hat{z}_e is a 'tracker bias' (not a true physical effect) since the model waveforms correspond to a zero sea level and we do not take into account non-uniform scattering along the surface (the electro-magnetic bias). However, when averaging waveforms along the altimeter track, skewness persists but the wave group effect should vanish because a , the amplitude of wave group effects, is symmetrically distributed around zero. Consequences for retracking with generalized waveforms are discussed in Appendix D.

2.5 Influence of idealized wave field anomalies on retracked parameters

Our wave field anomaly of amplitude a and location b gave us the perturbation to the waveform that in turn produces a perturbation of the retracked parameters: the estimates of wave height \hat{H}_s and sea level \hat{z}_e . Using the analytical form of the perturbed waveform (obtained in the limit of a broad antenna pattern, i.e. using $v = 0$ in eq. (A10), and ignoring the PTR), DC23 have computed the cost function C_{LS} analytically, replacing the discrete sum by an integral over all ranges from minus infinity to plus infinity. Taking its derivative with respect to \hat{H}_s and \hat{z}_e , they found that the cost function is minimum for these values of the retracked parameters

$$\hat{H}_s = H_s + \frac{aH_s}{2} J_H(b), \quad (10)$$

$$\hat{z}_e = -c\hat{\tau}/2 = -\frac{aH_s}{16} J_z(b), \quad (11)$$

with $b = \rho_0^2/\rho_C^2 = 2hH_s$ and

$$J_H(b) = 2b(6 - 16b^2)e^{-4b^2}, \quad (12)$$

$$J_z(b) = (2 - 16b^2)e^{-4b^2}. \quad (13)$$

The perturbation caused by the wave anomaly on the retracked parameter is proportional to aH_s and, a function of the off-nadir distance ρ_0 which we normalize as b . Further interpretation of J_H is given in section 2.3. In simple terms, the large values of $J_H(b)$ for b up to 0.30 are the main driver of the along-track correlation scale, as will be explained below. The analytical perturbations in eqs. (10)–(11) are typically accurate within 10% for LS retracking and $a < 0.2$, with some examples given in Table 1, showing that it is in fact fairly robust up to $a = 0.3$.

For more realistic waveforms or different cost functions such as ML or MMSE, there are no simple analytical solution. One can still analyze the perturbations of the retracked parameters and interpret the results by computing the following functions

$$\hat{J}_H(b) = 2(\hat{H}_s - H_s)/a, \quad (14)$$

$$\hat{J}_z(b) = 16(c\hat{\tau}/2)/(aH_s), \quad (15)$$

with results shown in Fig. 6. These results demonstrate that the analytical derivation in DC23 does not exact correspond to realistic waveforms, but it is qualitatively correct. The numerical estimates of the wave height perturbation \hat{J}_H and sea level perturbation \hat{J}_z were obtained for $a = 0.1$, progressively relaxing the different simplifying assumptions on the waveform: considering the instrument PTR, using a finite radar beam width. We also tested different cost function options: Least Squares (LS), and Maximum Likelihood (ML) with $r_{\min} = 0$ and $r_{\min} = 0.06$, and the MMSE of the WHALES retracker using the actual weights used for retracking Jason-2 in the Seastate CCI dataset. We note

Table 1. Fitted parameters (in meters), \hat{H}_s and epoch converted to distance, for the ($a = 0.3, b = 0$) waveform shown in Fig. 5.A,B, and a few other examples, using three different cost functions: the Least Square of eq. (5) and two versions of the Maximum Likelihood of eq. (6), with $r_{\min} = 0$ or $r_{\min} = 0.06$.

(a, b)	LS fit		eq. (10)		eq. (11)		ML fit		ML, $r_{\min} = 0.06$	
	\hat{H}_s	\hat{z}_e	\hat{H}_s	\hat{z}_e	\hat{H}_s	\hat{z}_e	\hat{H}_s	\hat{z}_e	\hat{H}_s	\hat{z}_e
(0.00, 0.00)	10.0	0.00	10.0	0.0	10.0	0.00	10.0	0.00	10.0	0.00
(0.30, 0.00)	9.5	0.42	10.0	0.38	13.5	0.29	14.9	0.79		
(-0.03, 0.00)	10.0	-0.04	10.0	-0.04	8.9	-0.25	9.6	-0.08		
(0.30, 0.25)	12.8	0.22	12.9	0.14	10.1	-0.33	11.7	0.05		
(-0.30, 0.25)	7.1	-0.12	7.1	-0.14	9.4	0.23	8.10	-0.05		

that relaxing the assumptions on the PTR has no visible effect when using LS fitting, and using the real radar beam width $\theta_{3\text{dB}} = 1.6^\circ$ instead of $v = 0$ also has a limited impact, especially for significant wave heights lower than the 10 m used here (not shown).

The \hat{J}_H and \hat{J}_z functions obtained with ML are very different from those obtained with LS: they are both maximum and larger for perturbations near nadir ($b=0$), which explains the stronger correlation between epoch and wave height anomalies when using ML fitting, as shown in Fig. 2.c. As discussed above, the ML cost function introduces a very strong sensitivity to the early part of the waveform, and hence to near-nadir perturbations ($b < 0.15$): the estimated \hat{H}_s can be corrupted by a very small area with very large waves. We have thus introduced the r_{\min} parameter as defined above in section 2.3. Even with this adjustment, the ML-estimated \hat{H}_s is a non-linear function of the perturbation amplitude a , as shown with the dotted line in Fig. 6, obtained with a negative wave height anomaly. Finally the WHALES retracker gives results close to ML retracking but are linear: the \hat{J}_H and \hat{J}_z are independent of the amplitude a .

2.6 Generalization to any wave field and H_l pattern

The analysis of localized wave height anomalies generalizes to any combination of anomalies when using LS fitting, because the retracked values are linear combinations of the perturbations for each anomaly. DC23 demonstrated that a good estimate of the retracked values \hat{H}_s can be obtained directly by filtering the map of local wave heights H_l using the functions J_H , without performing any retracking.

In the rest of this section, we have taken the most simple waveforms, as done in DC23, generated from the same surface used in that paper and in the next section. Fig. 7 shows details of the surface and corresponding waveform simulations with a nadir position at $(x = 11.7, y = 43.2)$. This is the location where LS retracking gives the highest value of \hat{H}_s . From the surface elevation in Fig. 7.(a) to the waveforms in Fig. 7.(f), the altimeter processing can be approximated with the following steps. First we may ignore the phases and only consider local wave heights H_l shown in (b), then we filter using the $J_H(b)$ filter in (c) to produce amplified anomalies in (d) that can be averaged for each normalized radius b into a value $H_b(b)$, as shown in (e), before summing the contributions for all radii to provide the local estimate 10.8 m. The local retracked value is $\hat{H}_s = 12.2$ m and both are significantly larger than the true wave height $H_s = 9.3$ m. This large local value is explained by the positive H_l anomalies around $b = 0.25$ ($\rho = \rho_C/2$) where J_H is positive and maximum, and the negative anomalies around $b = 0.9$ where J_H is negative. The sum can also be done directly on all pixels of panel (d), in

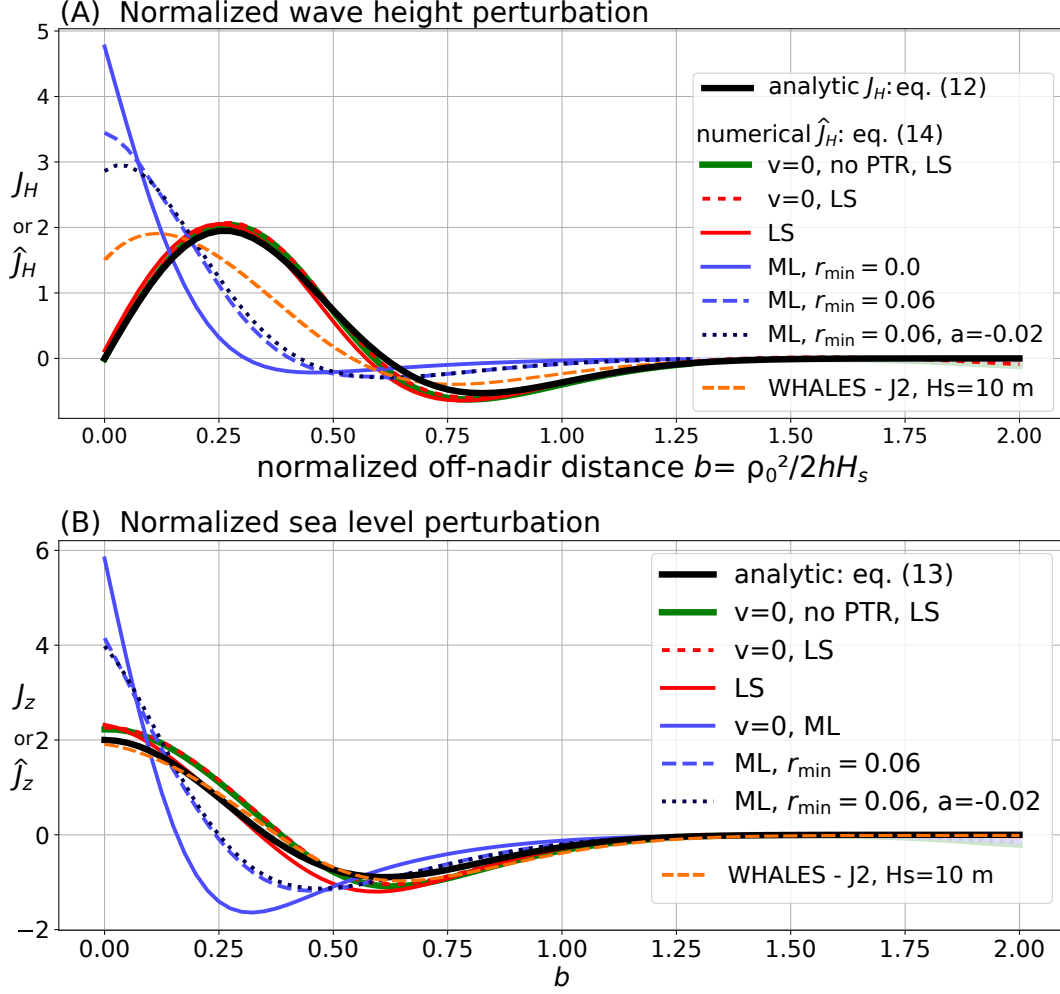


Figure 6. Influence of a local wave height anomalies as given by eqs. (8)-(9) when retracking with a waveform that uses $a = b = 0$, for (a) wave height (b) epoch as a function of the perturbation distance from nadir defined by the parameter b . All results were obtained for $a = 0.1$, except for the last curve with $a = -0.02$. The analytic expression are given by eqs. (12) and (13) and are independent of a . The numerical evaluations are given by eqs. (14) and (15) and were obtained for different waveforms, with a broad ($v(t) = 0$ in in eq. (A10)) or realistic beam, with or without PTR, with either LS or ML fitting. For realistic beams, the waveform power is also fitted, with very little influence on the adjustment of \hat{H}_s and $\hat{\tau}$. For the WHALES retracker the weights in the least-square cost function are the weights used for Jason-2 retracking in the SeaState CCI-V3 dataset, for a wave height of 10 m.

which case the equivalent perturbation amplitude is $a(x, y) = [H_l(x, y) - H_s] dx dy / (H_s A_{eq})$, and the contribution to \hat{H}_s of each pixel is $J_H(b) \times a(x, y) \times H_s / 2$, as given by eq. (10).

We note that if we multiply the surface elevation by -1, the crests become troughs and vice versa, leading to a slightly different waveform shown with the dashed line in Fig. 7.f, and a slightly different retracked value $\hat{H}_s^- = 11.8$ m, even though that surface has the exact same local wave heights H_l . It thus appears that the J_H filter can give an interesting approximation of the altimeter result, but it cannot be exact, due to phase effects that it does not represent.

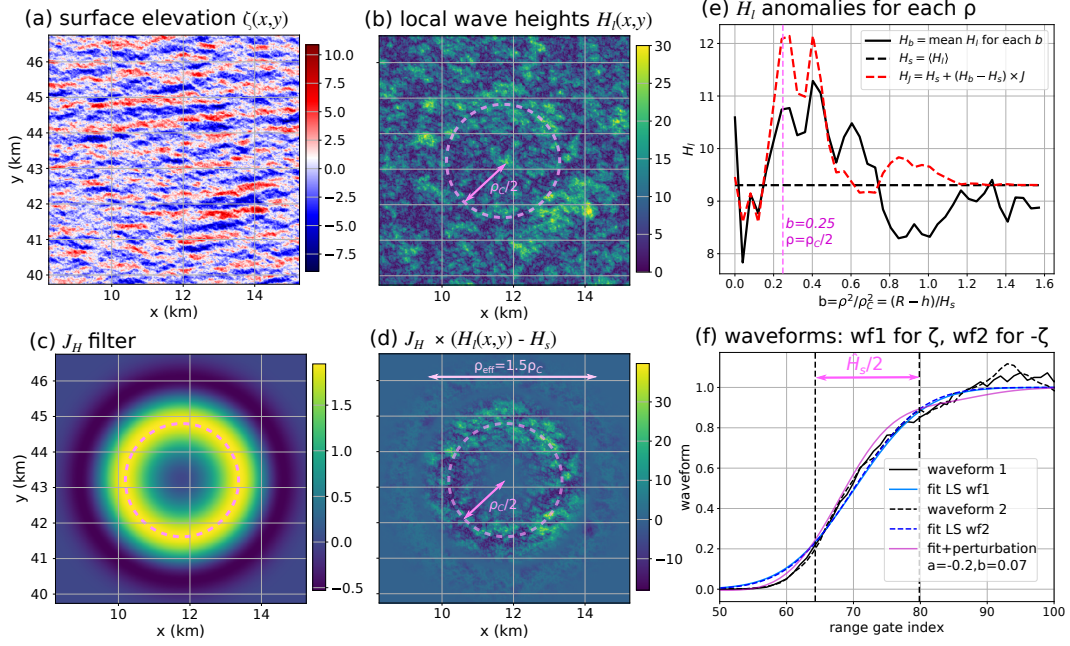


Figure 7. (a) surface elevation $\zeta(x,y)$ and (b) local wave height H_l around $(x = 12, y = 43)$ for the sea state used in Fig. 9. (c) shows the values of $J_H(b)$ with $b = \rho^2/\rho_c^2$ and ρ the distance from nadir. (d) J_H multiplied by the local wave height anomaly, (e) sums of anomalies for each distance-to-nadir b , (f) waveform simulated from $\zeta(x,y)$ and fits with different waveforms.

Testing further this J_H filter idea, and the equivalent J_z filter for the sea level, gives results shown in Fig. 8, now looking at all 11000 waveforms obtained from the same sea surface with nadir positions at all values of x and y spanning 35 km in each dimension. The right-most pixel of (a) corresponds to the case detailed in Fig. 7. Our filter theory does not reproduce all the details of the variability in \hat{H}_s and \hat{z}_e estimates, but it explains 80 to 90% of the variance. Here again, we have verified that changing the sign of the surface elevation gives a different estimation \hat{H}_s^- and $\hat{\tau}_s^-$. Interestingly, the theoretical value is very close to the average of \hat{H}_s and \hat{H}_s^- , as illustrated in Fig. 8.c,d.

3 A model for small scale \hat{H}_s fluctuations

3.1 Retracking of realistic waveforms

In all the simulations discussed in this paper, the perturbation of the estimated epoch that is proportional to H_s is completely spurious: it is a tracker error. In reality it will be combined with a true millimeter-scale sea level variation that is expected to scale like H_s^2 (Longuet-Higgins & Stewart, 1962; Ardhuin et al., 2004). In contrast, a large part of the variability of the wave height is real and may be of geophysical interest. In the case of wave groups, true perturbations of the local wave height H_l travel at the group speed and do not persist for more than a few minutes. For other sources of gradients in wave heights, H_l variability is related to a spatial gradient of H_s , and may persist longer and may be visible from one satellite pass to the next in the case of gradients caused by refraction over bottom topography or dissipation over mud banks. Whatever the source of the gradient in H_l , what is the smallest scale that can actually be resolved, and how well are the true patterns visible in altimeter data? To answer this question we use numerical simulations as described in Appendix B, starting from a directional wave spec-

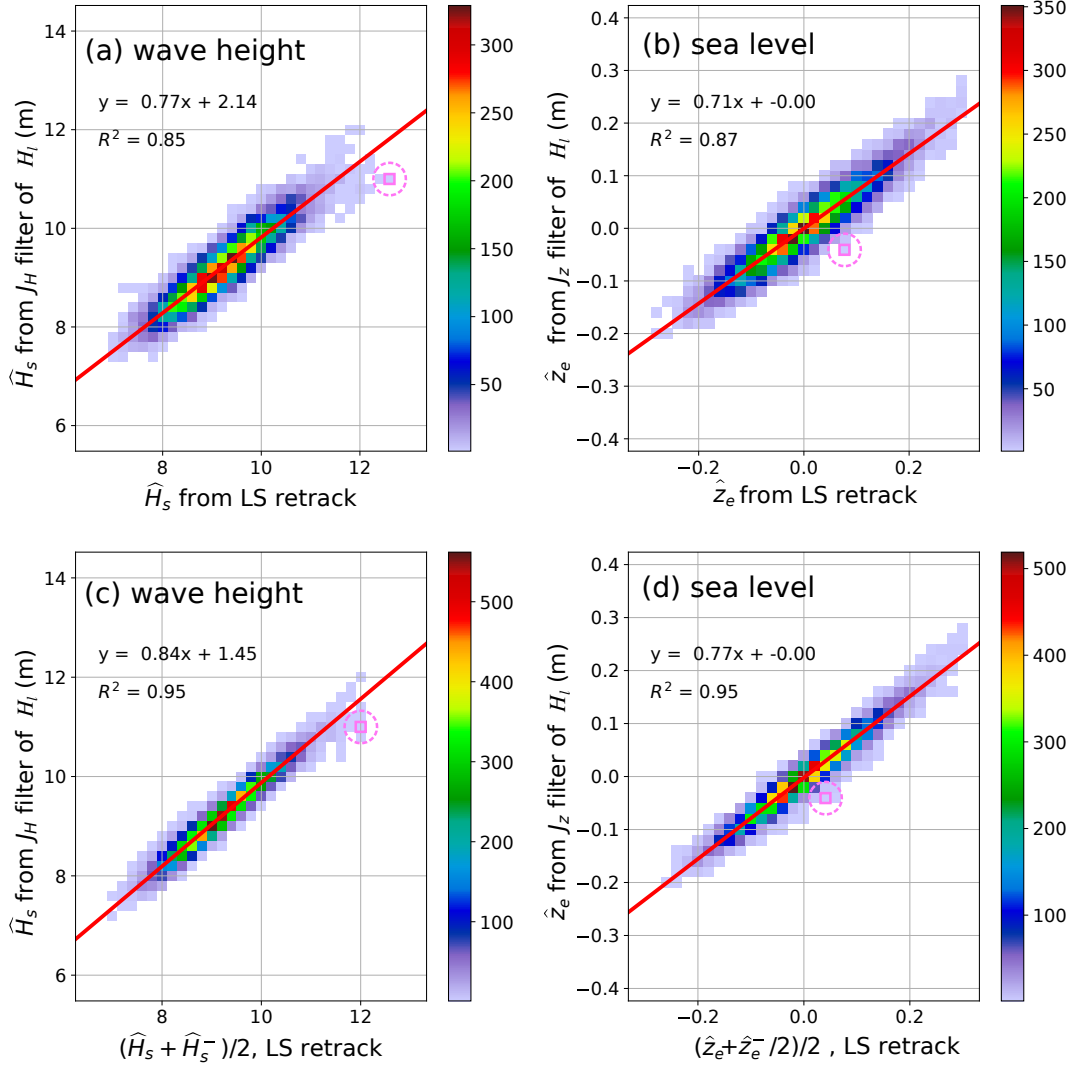


Figure 8. Scatter plots of retracked (a) wave height and (b) sea level for a 35 km all altimeter nadir position every 346 m in both x and y directions, giving 11,130 waveforms (without any noise added), compared to estimates using eqs. (10)-(11). Red lines are best fit to the data, and the pixel circled in pink correspond to the case in Fig. 7. (a) and (b) are obtained from the surface elevation $\zeta(x, y)$, (c) and (d) include a phase-average of two realizations $\zeta(x, y)$ and $-\zeta(x, y)$. Averaging over more realisations with different phases does not reduce further the scatter.

tra. In this section we use the same spectrum derived from CFOSAT L2S data that was already used in DC23.

Different retracking results are shown in Fig. 9 and compared to smoothed local wave heights in panel (c) and (d), which are obtained directly from the surface elevation without any retracking. The smoothed local wave height H_{l,σ_l} , are obtained from H_l , given by eq. (2), with a two-dimensional Gaussian smoothing with a parameter σ_l .

The first striking result is that the retrackers give sea level estimates in panels (a) and (b) with significant variability (of the order of 40 cm for the ML fit), whereas the

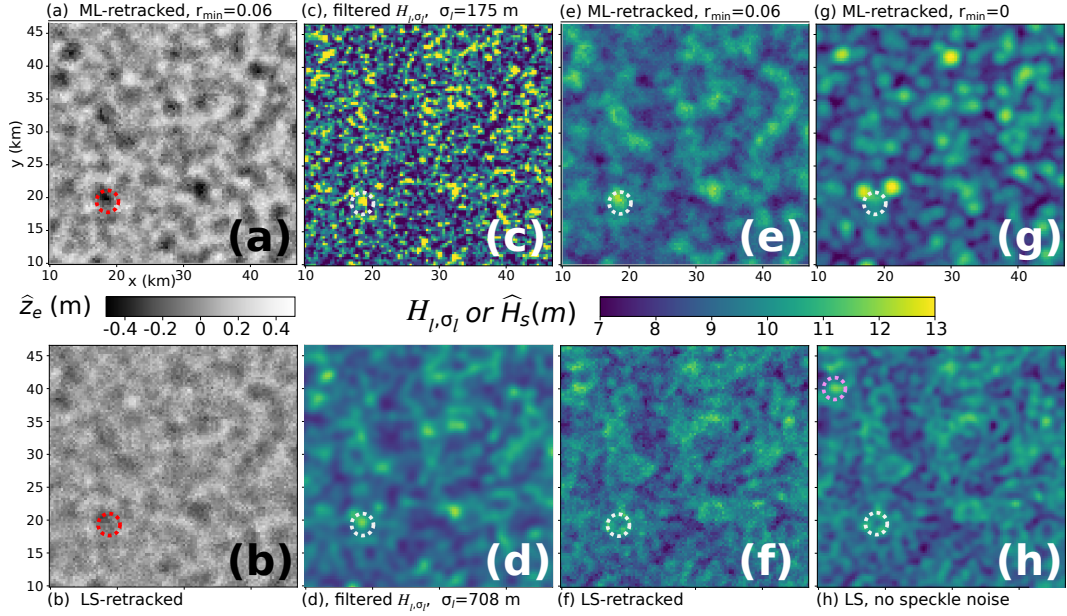


Figure 9. (a,b) maps of sea level estimated from waveform retracking using ML or LS cost functions, (c,d) maps of spatially filtered wave heights, using a two-dimensional Gaussian filter with a parameter $\sigma_l = 175$ m or $\sigma = \rho_C/4.5 = 708$ m, (e,f) maps of retracted \hat{H}_s corresponding to (a,b). (f) is the retracking of the same waveforms but with $r_{min} = 0.06$ in ML cost function, and (g) is obtained with the LS cost function retracking of waveforms without speckle noise. The dashed circle around the filtered peak at $x = 19$ km, $y = 20$ km, has a radius $\rho_C/2 = 1.6$ km.

true sea level is actually flat in the simulation. That variability generally follow the large scales of the envelope in Fig. 9.d, and miss smaller details present in 9.c.

For the wave heights, all retracking options used here give results that are visually clearly different from a simple Gaussian filter applied to the map of local wave heights H_l in (c) or (d). The ML-retracted \hat{H}_s in (e) is the most similar to the large-scale filtered local height H_l in (d), with a maximum near $x = 19$ km and $y = 20$ km that has a similar shape, but this is not the case for other localized maxima in (d) that have ring shapes in (e). These ring shapes are much more present with LS retracking due to the shape of the J_H function that is maximum for off-nadir perturbations, as further discussed in Appendix B. The radius of these rings is clearly related to the Chelton radius ρ_C , given by eq. (1), with a ring radius $\rho_C/2$ for LS retracking, corresponding to $b = 0.24$, and a smaller radius for ML retracking. Panel (g) was also obtained with ML but with $r_{min} = 0$, which gives different patterns. For example the maximum at $x = 19$ km, $y = 20$ km gives a pattern reminiscent of a Mickey Mouse face with ears much more prominent than the nose. The fact that the "ears" are more prominent comes from the presence of two higher but much more narrow peaks in H_l , above 16 m. These higher values are not visible in Fig. 9.c because the color bar is saturated. ML fitting with $r_{min} = 0$ therefore gives a very particular distortion of the true map of wave heights that strongly emphasizes very high peaks even if they are very narrow. Finally we have also included in (h) one example with LS retracking of waveforms that do not include speckle, with the ring shapes now appearing more clearly than in (f). With ML the speckle has no visible impact for this sea state (not shown).

3.2 Linking standard deviation of \widehat{H}_s to wave spectral shape

Because satellite altimetry is a technique more recent than in situ buoy measurement, the uncertainty of satellite data has generally been estimated based on buoy data (Abdalla et al., 2011; Dodet et al., 2020). These analyses have struggled to account for the fact that the two measurements cannot represent the same space-time coverage of the wave field. Section 2.6 has now clarified that, for least square cost functions, the spatial coverage of altimeters can be interpreted as a \widehat{J}_H -filtered map of the local wave heights H_l , with the \widehat{J}_H functions shown in Fig. 6 and H_l defined by eq. (2). We can now generalize the analysis of the statistical uncertainty of integrals of buoy spectra given by Young (1986) to provide estimates of uncertainties for these spatially filtered wave heights.

Indeed, Young (1986) showed that any integral of the wave spectrum $E(f)$, obtained from a time series is χ^2 -distributed. For the particular case of the zeroth moment of the wave spectrum $m_0 = \int E(f)df$ the number of degrees of freedom is related to the record length τ , $\nu_{m0}(\tau) = 2\tau/Q_f^2$ with the spectral frequency peakedness Q_f defined by

$$Q_f^2 = \frac{\int_0^\infty E^2(f)df}{(\int_0^\infty E(f)df)^2}. \quad (16)$$

Because the buoy estimate of the significant wave height is $\widehat{H}_\tau = 4\sqrt{m_0}$, it implies that \widehat{H}_τ is χ -distributed, and, assuming error-free measurements in the time series,

$$\frac{\text{std}(H_\tau)}{\text{mean}(H_\tau)} = \sqrt{\frac{\Gamma^2(\nu_{m0}(\tau)/2)\nu_{m0}(\tau)}{2\Gamma^2((\nu_{m0}(\tau)+1)/2)} - 1} \simeq 0.5Q_f/\sqrt{\tau}, \quad (17)$$

where Γ is the Euler gamma function.

Following Young (1986), if we had a perfect spatial mapping of the surface elevation $\zeta(x, y)$ over a square of side length L , then \widehat{H}_L is a χ -distributed random variable with $\nu_{m0}(L) = 2L^2/Q_{kk}^2(2\pi)^2$ degrees of freedom, giving the uncertainty

$$\frac{\text{std}(H_L)}{\text{mean}(H_L)} = \sqrt{\frac{\Gamma^2(\nu_{m0}(L)/2)\nu_{m0}(L)}{2\Gamma^2((\nu_{m0}(L)+1)/2)} - 1} \simeq \pi Q_{kk}/L. \quad (18)$$

Q_{kk} is given by eq (4), and is analogous to Q_f but defined from the double-sided wavenumber spectrum $E(k_x, k_y)$, instead of the single-sided frequency spectrum $E(f)$.

In our example, with $Q_{kk} = 43$ m and $Q_f = 4 \text{ s}^{0.5}$, a standard 20-minute buoy record gives a relative uncertainty $\text{std}(H_\tau)/H_s = 0.058$, and it would take a square of side length $L = 2.4$ km to obtain the same uncertainty.

More generally, the same relative uncertainty is given by equating eq. (17) and eq. (18) giving the spatio-temporal equivalence between observations of spatial scales L and time scale τ ,

$$L = 2\pi \frac{Q_{kk}}{Q_f} \sqrt{\tau}. \quad (19)$$

However, for an altimeter single measurement, our simulations in Fig. 9.e give a relative uncertainty of 0.085 that is equivalent to a square side $L = 1.6$ km. That scale is about $\rho_C/2$, and thus covers the same area as a disk of radius $\rho_C/(2\sqrt{\pi})$.

Alternatively, this result can be obtained by integrating the PSD of H_l . In the limit of statistics taken over scales d_1 much larger than ρ_C eq. (step 4 bis) in DC23 gives,

$$\text{std}(\widehat{H}_s) \simeq \frac{\sqrt{2(4-\pi)}Q_{kk}H_s}{4.5\rho_C} \simeq \frac{4.2Q_{kk}\sqrt{H_s}}{\sqrt{h}} \quad (20)$$

The combination of $L \simeq \rho_C/2$ with eq. (18) gives the same result with the factor 4.2 replaced by 4.4.

Because altimeter data is generally averaged or filtered along-track in order to reduce the uncertainty of the measurements (Schlombach et al., 2020), we will now examine the uncertainty of the resulting along-track averages. For this we first need to investigate along-track correlations and define an effective resolution.

3.3 Along-track correlation and effective resolution of \hat{H}_s

The best retracker for sea level in Fig. 9 is the one that will give the smallest values of \hat{z}_e , hence the LS retracker with results shown in (b). For the wave heights, it is unclear what are the retracking options that give the most accurate representation of the variability of the local wave H_l . Here we propose that wave heights \hat{H}_s should be as similar as possible to the along-track sampling of the smoothed local wave height H_{l,σ_l} , obtained from H_l with a two-dimensional Gaussian smoothing with a parameter σ_l . A reasonable expectation, consistent with the power spectrum of along-track \hat{H}_s (Fig. 10.a), is that the "reasonable truth" is given by filtering with a scale $\sigma_l \simeq \rho_C/4$, which is $\sigma_l = 800$ m in the example considered here. We may dream of being able to resolve smaller details, that can be found for example in $H_{l,\rho_C/10}$, corresponding to $\sigma_l = 320$ m, but that "dream" is out of reach of altimeters, given the sensitivity kernels \hat{J}_H for different retracking options, as shown in Fig. 6. For all the waveforms we have tried, the least square cost function leads to a maximum sensitivity, the maximum of \hat{J}_H , at $b = 0.25$ which corresponds to a distance from nadir $\rho = \rho_C/2$. This is confirmed by along-track spectra of \hat{H}_s and their co-spectra with the "reasonable truth", shown in Fig. 10.c,d. First

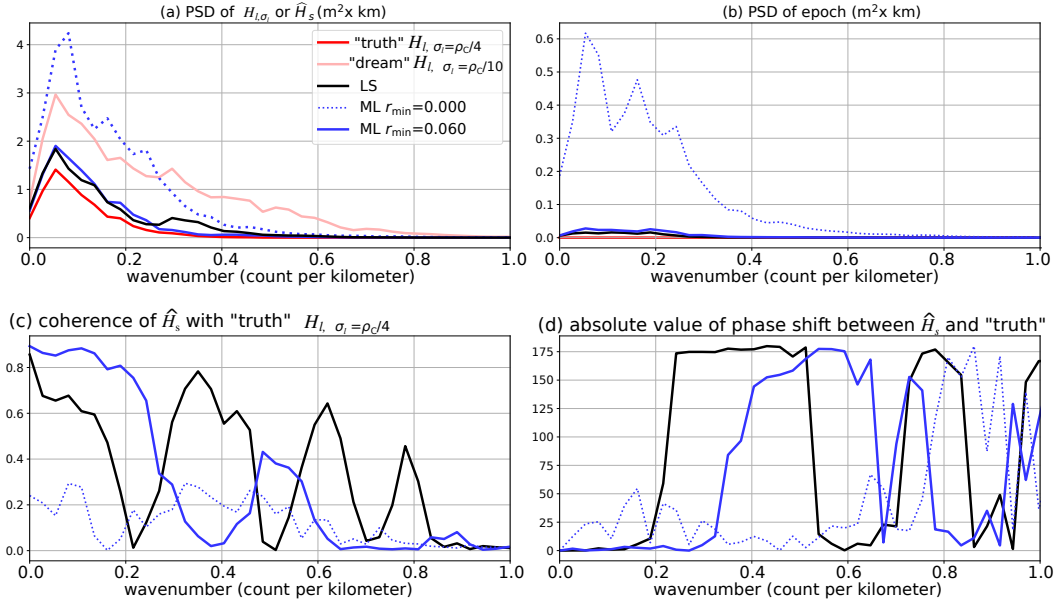


Figure 10. Along-track spectra of \hat{H}_s and $\hat{z}_e = -\hat{r}c/2$ estimates with different retracking options in the case of noiseless waveforms. (c) and (d) shown their coherence and phase shift relative to a "reasonable truth" $H_{l,\rho_C/4}$ obtained by filtering the local wave height H_l with a 2-dimensional Gaussian filter of width $\sigma_{l,4} = \rho_C/4$ centered at the nadir point, while the "alternative truth" that contains much smaller detail is $H_{l,\rho_C/10}$.

considering the LS retracking, the black curve in Fig. 10.a, we find that its spectrum is

similar but slightly higher than the "reasonable truth", consistent with the analysis by DC23 who found the same variance as the "truth" when using $\sigma_l = \rho_C/4.5$. The ML retracking was adjusted, with $r_{\min} = 0.06$ to give a similar PSD, while maximizing the coherence with the reasonable truth. This is detailed in Appendix C.

The coherence and phase are useful to quantify the distortion effect caused by the maximum of the J_H function away from $b = 0$, and its change of sign. In along-track spectra this leads to scales for which the coherence goes to zero for LS retracking, here at $k \simeq 0.22, 0.5$, and 0.71 count per km (cpk), corresponding to wavelengths $L \simeq 1.5, 0.7$ and 0.46 times ρ_C . For these wavenumbers, the coherence phase jumps from near zero to near 180° and back. As a result, LS retracking does not reproduce correctly any detail at wavelengths shorter than about $1/(0.24 \text{ cpk}) \simeq \rho_C/0.75$, and it misses part of the true variability for scales longer than that. Assuming that we need at least two independent measurements per resolved wavelength, we may define an effective along-track resolution $\rho_{\text{eff}} = \rho_C/1.5$.

3.4 Uncertainty of averaged estimated wave heights \overline{H}_s

Now that we know how \hat{H}_s estimates are correlated along-track we can estimate the uncertainty of \overline{H}_s , the average of n ($< \cdot >_n$) consecutive values of \hat{H}_s . For independent measurements this reduction would be a factor $1/\sqrt{n}$, but because the successive footprints overlap, there is only a $\sqrt{n_f/n}$ reduction where n_f is the number of data points per effective footprint,

$$n_f = \frac{\rho_{\text{eff}}}{V_n/f_s} \simeq \frac{\sqrt{2H_s h}}{1.5V_n/f_s}, \quad (21)$$

where $V_n \simeq 7\text{km/s}$ is the velocity of the satellite nadir on the ground, and f_s is the sampling frequency of the measurement, typically $f_s = 20$ Hz for most altimeters. This gives an expected variance of (\overline{H}_s) caused by wave groups,

$$\text{var}_{\text{wg}}(\overline{H}_s) = \text{var}(< \hat{H}_s >_n) \simeq \frac{4.2^2 Q_{\text{kk}}^2 n_f H_s}{nh}, \quad (22)$$

All these calculations assumed noise-free measurements, but the interference of radar waves causes speckle noise, just like the interference of waves make groups. Speckle gives an extra term in the cost function that is a sum of χ^2 -distributed independent variables, and thus also χ^2 -distributed, as detailed in Appendix A.3 of DC23. The corresponding variance of fluctuations induced by speckle noise is given by,

$$\text{var}_s(\overline{H}_s) = s \times H_s/n \quad (23)$$

with s a function of the number of pulses N_p per measurement. For least-square fitting with broad antenna patterns DC23 found

$$s \simeq s_0/N_p, \quad (24)$$

with $s_0 = 5$ m. This expression gives $s = 0.019$ m for the LS fit of CFOSAT waveforms. It should be noted that the variance induced by speckle averages out faster than the wave group effect, like $1/n$, without the correction factor n_f . We note that for wave heights under 3 m, the speckle effect is further influenced by the discretization of the waveform and typically gives higher values of s_0 .

We may assume that both effects are uncorrelated giving a total variance,

$$\text{var}(\overline{H}_s) = \text{var}_{\text{wg}}(\overline{H}_s) + \text{var}_s(\overline{H}_s). \quad (25)$$

4 Verification over a wide range of simulated sea states

Although we looked in detail at a single and very particular sea state, we expect that our uncertainty model is applicable to any sea state, which is uniquely characterized by two parameters: the significant wave height H_s and the wavenumber spectral peakedness Q_{kk} . The uncertainty model is also a function of the satellite instrument configuration through the altitude h and number of pulses averaged.

Given the prominent role of the peakedness, it is interesting to show the expected variability of Q_{kk} . We have used a 0.5 degree resolution global WAVEWATCH III model configuration with wave generation and dissipation source terms parameterized following the T702GQM option described in Alday and Ardhuin (2023), using a quasi-exact calculation of wave-wave interactions (Lavrenov, 2001; Gagnaire-Renou et al., 2010). As expected from its definition, Q_{kk} is much larger for swells than for wind seas, and generally larger for longer dominant periods. Fig. 11 gives average values of Q_{kk} over a time period corresponding to the Austral summer and Fall.

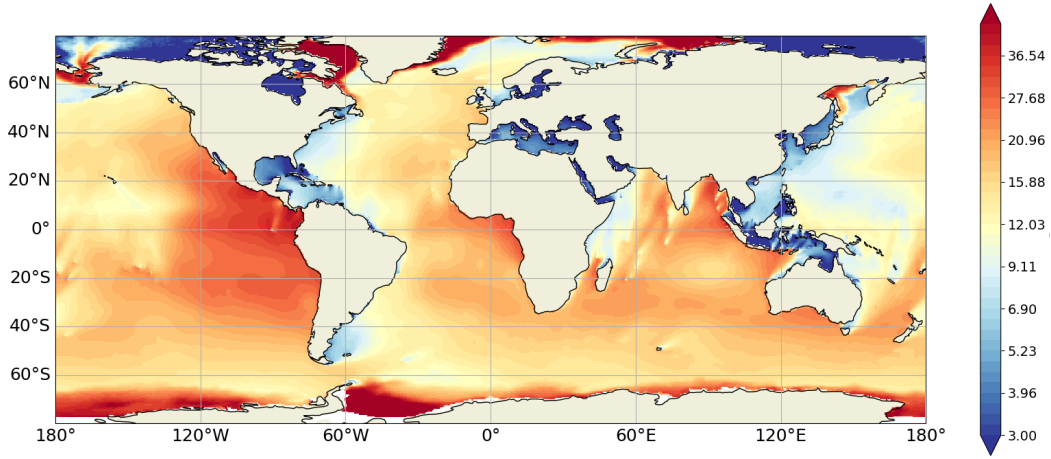


Figure 11. Map of the mean values of Q_{kk} , in meters, simulated for January to July 2023.

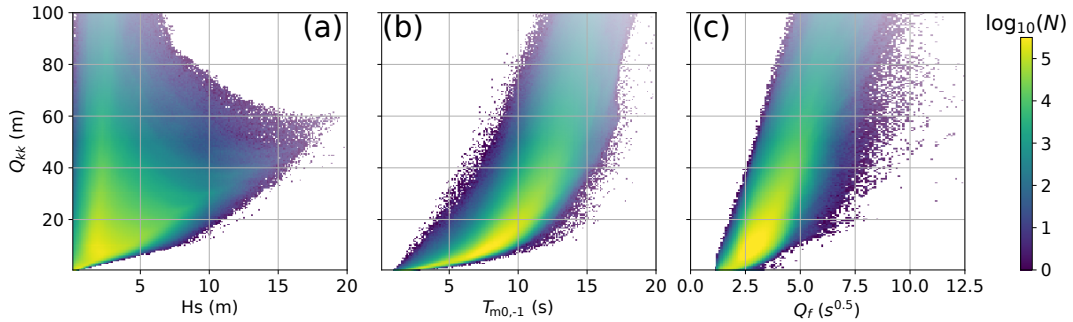


Figure 12. Distribution of modeled peakedness Q_{kk} for ice-free conditions for January to July 2023, against usual parameters (a) H_s and (b) energy period $T_{m0,-1}$. (c) compares Q_{kk} to the peakedness for the frequency spectrum Q_f .

We chose that time frame to minimize the effect of sea ice in the Southern Ocean: the presence of sea ice strongly damps the shorter wave components, leading to very large values of Q_{kk} and very small wave heights. Outside of ice-covered regions, Q_{kk} is typically under 10 m for enclosed seas and fetch-limited regions, and increases to 15–40 m in the swell pool of the Eastern Pacific. Besides these mean values there is a significant variability, with a general increase with wave height shown in Fig. 12.a. Among the usual sea state parameters, Q_{kk} is best correlated to the square of the so-called energy period $T_{m0,-1}$ (Fig. 12.b). When comparing the uncertainty of wave heights from buoy measurements and satellite data, it is also useful to know that there is not a simple correspondence between Q_{kk} and Q_f (Fig. 12.c).

We have simulated waveforms for 250 different sea states selected to fill a gridded histogram of H_s and Q_{kk} . We insist that our sea state selection maximizes the ranges of H_s , from 0.5 to 12.5 m, and Q_{kk} varying from 3 to 110. Most of these selected sea states are extremely unlikely, as shown in Fig. 12.a. A first display of the variability for the sea level and wave height is shown as a function of the wave height in Fig. 13. In each panel, each dot corresponds to a different sea state with a given value of H_s and Q_{kk} . For each dot, 11000 waveforms were simulated from the same sea surface, shifting the nadir position (as we did for Fig. 9) and retracked. Waveforms were simulated with and without speckle noise, and each was retracked with both LS and ML cost functions, using $r_{\min} = 0.06$. The variability generally increases with wave height. For sea level, in panels a and b, it is of the order of 1 to 3% of H_s , with some enhancement caused by speckle noise. We note that ML-based retracking is more noisy than LS for \hat{z}_e retrieval, with occasional outliers. For wave heights, the variability is generally higher with LS retracking once speckle noise is taken into account (panel d). We have found that even for ML fitting, our simulated speckle noise that multiplies the waveform gives an additional term to the variance that is only a function of H_s , and eq. (23) as shown in Fig. 13.e, with a variance reduced by a factor 5 compared to LS fitting.

At any given wave height, the variability can take values that differ by a factor 4 or more, as we expect from our analysis and the range of possible Q_{kk} values. We verify our uncertainty model given by eq. (20) by plotting the uncertainties, now normalized by H_s to a power p against Q_{kk} . We first note that the sea level scales with $p = 1$, probably due to the zero average of J_z , but we have not investigated this question further. For wave heights, eq. (20) gives a good representation of the data without speckle noise, and eq. (25) is a good model for the full simulation that includes noise. In both cases there is an underestimation of the variability for high values of Q_{kk} .

We finally estimate along-track averages of 20 consecutive values to simulate 1 Hz averages in Fig. 15. Showing that the error model given by eq. (22) is generally correct.

5 Discussions and applications

The uncertainty model proposed in eqs. (22)–(23) and verified with Fig. 14.d,h, appear robust, and is explained by the correlation structure that we understand well for the Least Square cost function and appears to also hold for our adaptation of the Maximum Likelihood cost function. Some persistent biases may be refined. For example, the speckle contribution is underestimated for large wave heights. This is possibly due to the use a broad antenna pattern in DC23: for the largest wave heights and narrow radar beams the different shape of the waveform will give a different value of s_0 , which can possibly be obtained analytically or numerically. Another bias is found for $Q_{kk} > 50$, with an underestimation of the wave group contribution given by eq. (20). In these cases the spectrum of the surface envelope must be very narrow, possibly narrower than the altimeter transfer function (the Fourier transform of J_H), and the approximation proposed in DC23, that the envelope PSD is constant, is likely to overestimate the variability of \hat{H}_s .

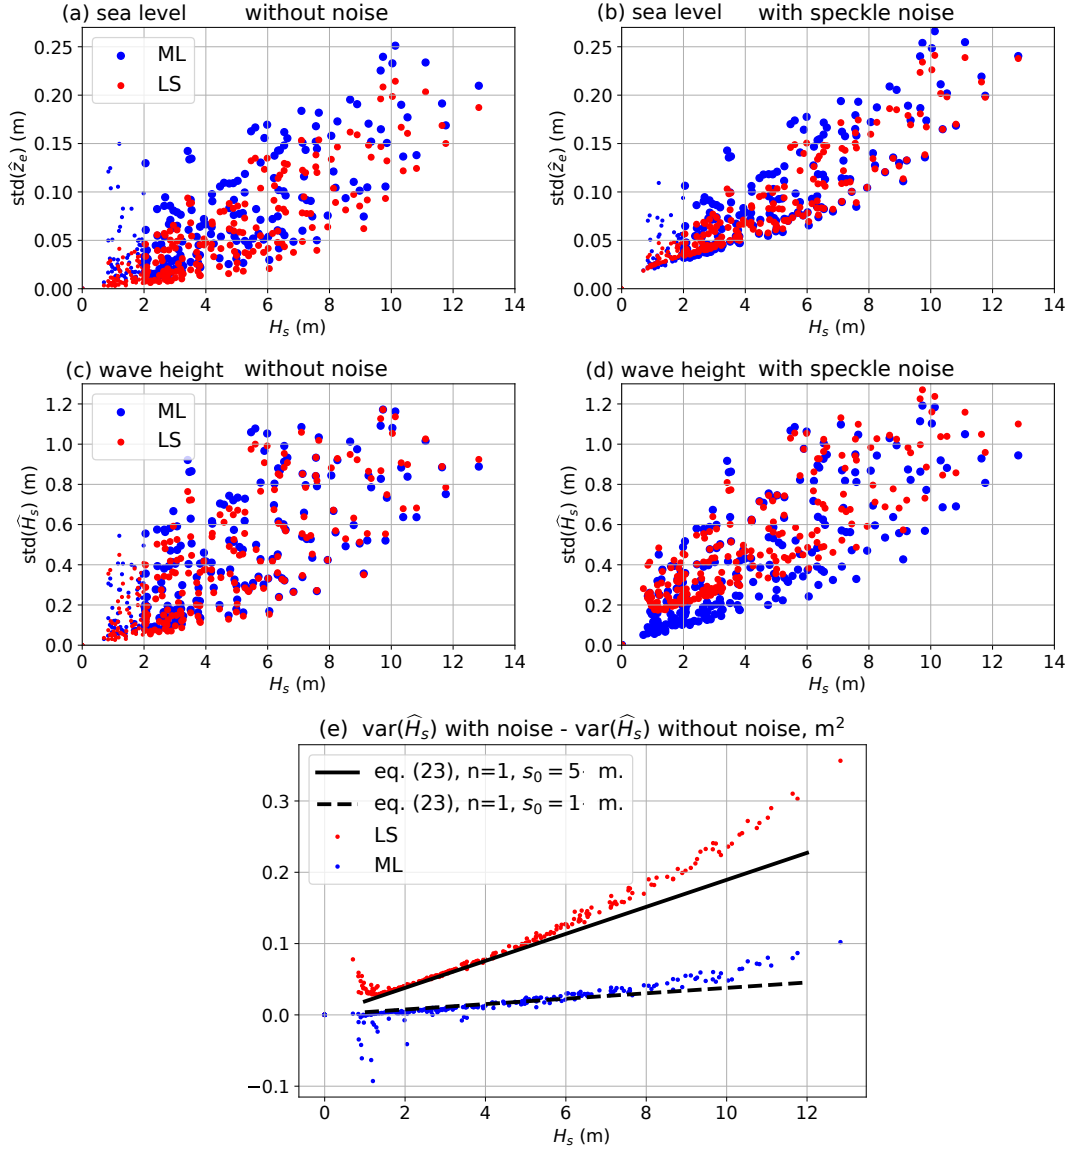


Figure 13. Variability of (a,b) estimated sea level \hat{z}_e , and against Q_{kk} , (c,d) wave height \hat{H}_s against H_s . (e) Speckle contribution to the variance of wave height.

This may be corrected by computing the spectral convolution (Step 3 in DC23), or using a better approximation for the envelope spectrum, not as a constant but for example a two-dimensional Gaussian function. For our objective, very few conditions are concerned as the median value of Q_{kk} is under 60 m, even for wave heights up to 18 m. This will be a real issue when extending the present work to Delay-Doppler altimetry, as the effective footprint becomes very small in the along-track direction.

5.1 Other satellite missions

we are now in a position to propose a clear trade-off between precision and resolution for storm conditions for CFOSAT data, and possibly extrapolate this to other satellite missions, as illustrated in Fig. 16. And it would be interesting to compare the measured values of $\text{std}(\hat{H})_s$ at cross-overs from different missions. Due to the scaling of the

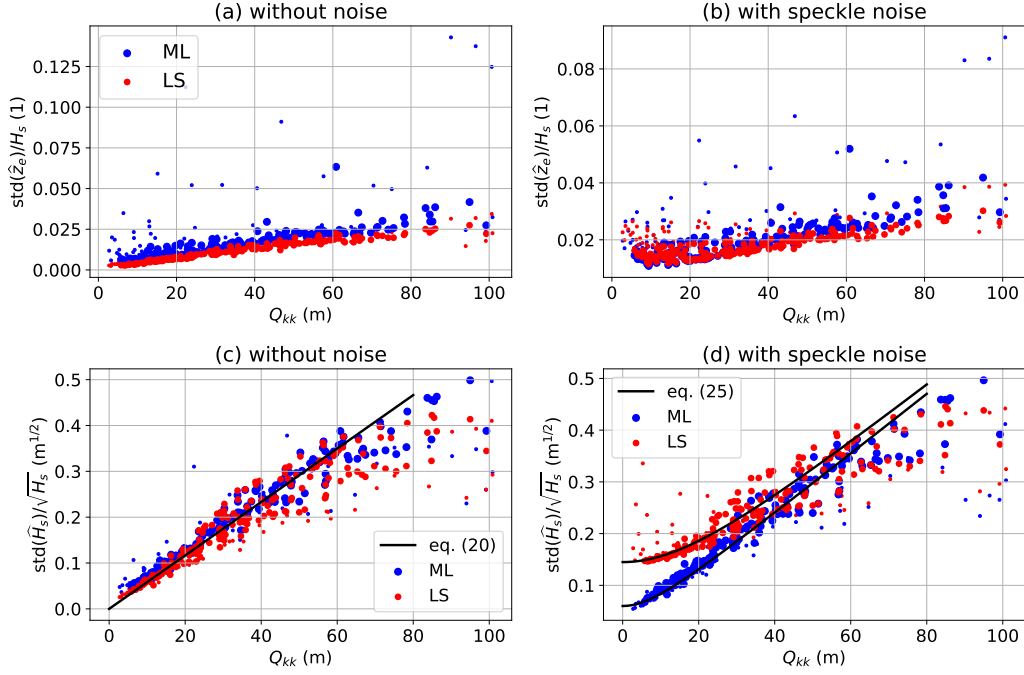


Figure 14. Variability of (a,b) estimated sea level \hat{z}_e against Q_{kk} , (c,d) wave height \hat{H}_s against H_s . This is the same data as in Fig. 13 but rescaled and plotted against different variables. Smaller dots correspond to cases with $H_s < 2$ m.

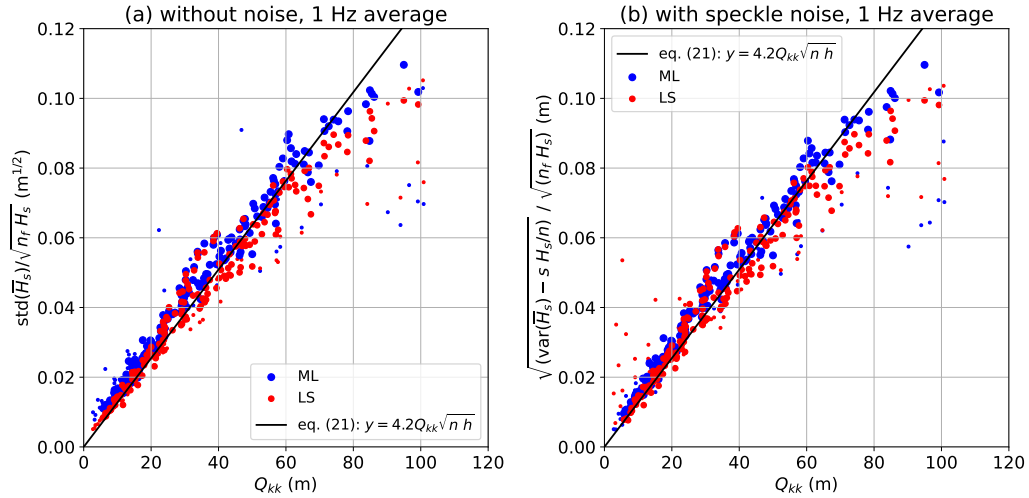


Figure 15. variability of along-track 1 Hz averages \bar{H}_s rescaled and plotted against Q_{kk} .

effective footprint with $\rho_C = \sqrt{2hH_s}$, the lowest altitude of CFOSAT allows it to have a higher resolution with $h = 519$ km, compared to the $h = 1336$ km of Jason 3. The sampling $f_s = 4.5$ Hz of CFOSAT is particularly efficient, with measurements that are more more independent than with $f_s = 20$ Hz. For CFOSAT the available time between independent samples is well used by scanning the ocean with off-nadir beams to measure the wave spectrum (Hauser et al., 2021) that can be used to estimate Q_{kk} , as in DC23,

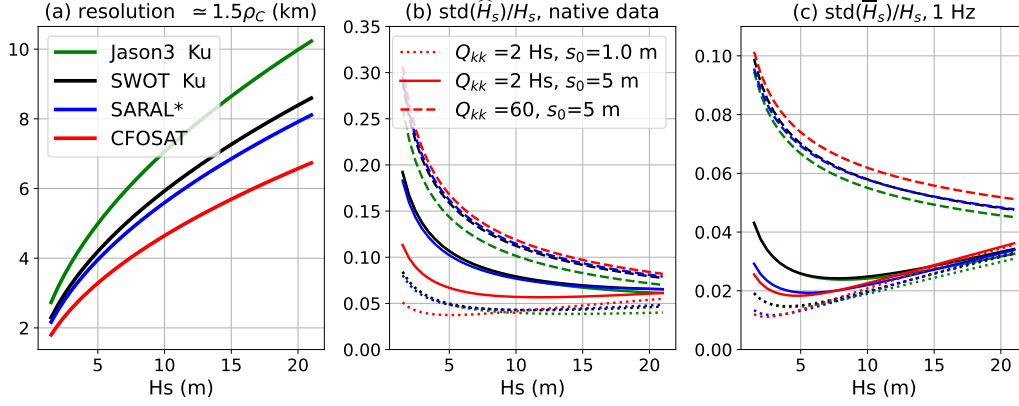


Figure 16. Resolution and uncertainty for wave height measurements extrapolated to other satellite missions, taking into account their different altitudes and acquisition chronogram (number of pulses per burst N_p and number of bursts per second f_s), but neglecting the effect of the antenna aperture: (a) spatial resolution estimated as $1.5\rho_C$ (b) normalized standard deviation of the measurement, (c) normalized standard deviation of 1 Hz along-track averaged measurements. We have used typical values of $Q_{kk} = 2H_s$ for wind-seas and a higher value for very long periods or narrow swells $Q_{kk} = 60$. The speckle parameter $s_0 = 5$ m is typical of least square (LS) fitting, while $s_0 = 1$ m corresponds to maximum likelihood (ML).

and other properties useful to interpret nadir altimetry such as the skewness and the slope-sea level correlations (Srokosz, 1986). Future missions can use the same type of nadir + off-nadir design to also measure ocean currents (Ardhuin, Brandt, et al., 2019).

Even for a low wave height of 1 m, at the Jason 3 altitude, the 20 Hz data is only useful for reducing speckle. The value $n_f = 0.1$ means that, without speckle, a 2 Hz sampling would be enough to sample the variability induced by wave groups. This is where ML retracking, with $s_0 \simeq 1$ m (see Fig. 16.b) can also be used to reduce noise levels, in particular for wind seas with low wave heights (solid and dotted lines). However, when data are averaged over 1 Hz, the speckle contribution is less important, especially for swell-dominated conditions (dashed lines in Fig. 16.c). In that case a higher orbit provides averaging over a wider area, both along-track and across-track.

5.2 Re-defining significant wave heights

Looking back at Fig. 3, there is a need for defining the underlying wave height from fluctuating measurements. The obvious solution is to average the data along-track and estimate the precision of the average using our uncertainty model. We give here two examples.

In the case shown in Fig. 2, the maximum estimate \hat{H}_s is 11.8 m, using LS fitting. When averaging over the 50 bursts, and considering our sampling error model we get the following estimate of the underlying true wave height (removing speckle and wave group effects), $H_s = 9.2 \pm 0.3$ m.

Hanafin et al. (2012) reported the highest-ever wave height measurement at $\bar{H}_s = 20.1$ m, using a Jason-2 data over storm Quirin on 14 February 2011 at 11:05 UTC, in the North Atlantic, with a relative precision $\langle \text{std}(\hat{H}_s)/\hat{H}_s \rangle = 8.9\%$ for the neighboring values. This is a 1 Hz-averaged data. Due to a different retracker, called WHALES,

the maximum value for this event was revised at $\overline{H}_s = 19.7$ m in the version 3 of the Sea State CCI dataset (Schlombach et al., 2020), with a relative precision of 6.4%. Based on Fig. 6, we expect that the WHALES retracker to provide an effective resolution ρ_{eff} in between the ML and LS retrackers, and thus expect that the uncertainty model, eqs. (20) and (23) also applies. We thus expect the the effective Jason resolution to be close to 10 km. Without a specific wave model hindcast of that storm we may expect $Q_{\text{kk}} \simeq 60$ based on Fig. 12.a. With that value, our uncertainty model, eqs. (20) and (23) using $N_p = 90$ and $h = 1336$ km, give $\text{std}(\hat{H}_s) = 1.43$ m for a single 20 Hz estimate. For reference, the value provided in the CCI dataset is $\text{std}(\hat{H}_s) = 0.58$ m. That value is anomalously low compared to the neighboring 1 Hz record with the following sequence of 9 values centered on the record with the maximum wave height $\text{std}(\hat{H}_s) = 1.43, 1.35, 1.31, 1.08, 0.58, 1.09, 1.3, 1.6, 1.1$ m, corresponding to 1 Hz averages $\overline{H}_s = 19.7, 17.6, 18.8, 19.3, 19.7, 17.6, 17.2, 18.3$ and 17.8 m. The number of valid waveforms was also minimum (13 out of 20) for that record with the lowest variability.

Our model uncertainty for the 1 Hz average, eqs. (22) and (23) gives 0.90 m, or about 5% of the measurement, with wave groups alone accounting for 0.87 m. We may average over a longer distance to get a mean value of H_s and the corresponding uncertainty. Averaging over 54 km (9 points at 1 Hz) reduces the uncertainty to 0.29 m and gives an average of 18.5 m.

Hence, what should be reported as the maximum value of H_s ? Is it 19.7 ± 0.9 m, from the 1 Hz record, or 18.5 ± 0.3 m from the 54-km average? From our analysis the first number is likely to be strongly impacted by wave groups: it may be correct for defining a local wave height that is physically correct, there is indeed a region with very high waves over a few kilometers of the satellite track, just like on Fig. 3. However if we want to compare to numerical wave models that ignore wave groups, the longer along-track average is a better choice.

Alternatively, filtering small-scale variations in \overline{H}_s can be done using Empirical Mode Decomposition (Quilfen et al., 2018; Dodet et al., 2020). That procedure gives $H_s = 18.7 \pm 0.3$ m, a value also reported in the CCI dataset, which is consistent with our estimate. Further analysis of other storm events will be useful for better understanding of the output of denoising using Empirical Mode Decomposition (Quilfen et al., 2018).

6 Conclusions and perspectives

Following the demonstration by De Carlo et al. (2023) that the sampling uncertainty in the presence of wave groups is a significant source of along-track fluctuations in altimeter measurements, we have explored how we may interpret these fluctuations and define an uncertainty for the underlying true significant wave height. Our argument is that the contribution of wave groups to the local wave height should be removed when estimating a significant wave height due to their fast propagation: they are not relevant for most applications. That approach is consistent with phase-averaged wave modelling in which wave group fluctuations are absent. We have confirmed the analysis by DC23 for a wide range of realistic waveforms and retracking methods: the amplitude of small-scale fluctuations caused by wave groups is proportional to the peakedness parameter Q_{kk} and the square root of the wave height. These fluctuations are spatially correlated through the effective footprint width that can be approximated as $\rho_C/1.5$, with some small differences depending on the details of the retracking method. This provides a useful scale to count the number of independent data in a satellite segment. The along-track distance $1.5\rho_C$ is also a good estimate of the shortest wavelength that can be resolved in the spatial pattern of the local wave height, including wave groups when they are present. This finest resolution is achieved when using some form of Maximum Likelihood cost function that is more sensitive than the least square cost function to perturbations near nadir, and the weighted least squares used in WHALES provides an interesting intermediate

method. These prediction could be tested with cross-overs between Jason-3 and SWOT which carries a nadir Poseidon-3 altimeter that is a copy of the Jason-3 instrument, but at a different altitude. It should also be possible to see that speckle noise is decorrelated between measurements from satellites flying in tandem with a 30 s time separation, whereas the effect of wave groups should be persistent (Rieu et al., 2021).

Our implementation of a Maximum Likelihood cost function may provide more realistic estimates of wave heights, but it generally led to larger errors in the sea level. The WHALES retracker is an interesting candidate for obtaining both accurate sea level and wave heights. An alternative approach was timidly explored in Appendix D: one may add more degrees of freedom to the waveform shape to properly handle their more complex shapes, including wave groups and skewness effects.

For very large wave heights, say $H_s > 15$ m, we find that the effective altimeter along-track resolution is of the order of 6 km or more, depending on the satellite altitude. Any estimate of wave heights with an accuracy of 3% or better typically requires along-track averaging or spatial filtering methods. With this kind of post-processing (averaging or filtering), the effect of speckle noise is less important, and we might even make a meaningful use of the C-band instruments that are also present on most satellite altimeters in addition to the Ku-band data that were discussed here.

The effects of wave groups on Delay-Doppler altimetry are not obvious a priori, and will require a dedicated investigation. As noted by Moreau et al. (2018), the anisotropic measurement geometry of Delay-Doppler altimetry introduces the difficulty that narrow directional swells are now part of the sea level fluctuations when propagating along-track, whereas they are still very much part of the sea state when propagating cross-track. That difficulty may be leveraged to provide some advantage, for example for swell detection (Altiparmaki et al., 2022; Collard et al., 2022).

Appendix A Derivation of a theoretical waveform

In the following we shall use the same notations as in Tourain et al. (2021). We generalize the usual approach by Brown (1977), allowing the vertical distribution of scattering elements, denoted as PDF, to be a function of both the horizontal distance to nadir ρ and the time t . In practice we start with Gaussian surface elevation PDF with a standard deviation σ_H , which translates to a standard deviation in the arrival time of the echo $\sigma_s = 2\sigma_H/c$, with c the speed of light. At nadir, $\rho = 0$, the epoch τ defines the local mean sea level and we have,

$$\text{PDF}(\rho = 0, t) = G(\sigma_s, \tau, t) = \frac{e^{-(t-\tau)^2/2\sigma_s^2}}{\sigma_s\sqrt{2\pi}}. \quad (\text{A1})$$

Off-nadir this generalizes to (Chelton et al., 1989)

$$\text{PDF}(\rho, t) = G(\sigma_s, \tau + t_\rho, t) \quad (\text{A2})$$

where R_E is the Earth radius, h is the satellite altitude, and the radius-dependent time shift is

$$t_\rho = \frac{\rho^2}{ch}(1 + h/R_E). \quad (\text{A3})$$

This gives the theoretical waveform as

$$S(t) = \underbrace{\text{PDF}(\rho = 0, t) * \text{FSSR}(t)}_{\text{SSR}(t)} * \text{PTR}(t). \quad (\text{A4})$$

where FSSR stands for Flat Sea Surface Response and PTR stands for Point Target Response. The first convolution represented by the symbol $*$ is in fact the sea surface response SSR obtained from the integral over the distance from nadir ρ (Brown, 1977). We introduce a local perturbation of σ_s which becomes $\sigma_s(1+\Delta)$ and this perturbation affects an area A_0 of the ocean centered at the distance from nadir ρ_0 , which correspond to a range $h + R_0$ in the absence of waves. DC23 showed that the $\text{PDF}(\rho, t)$ could be assumed Gaussian for each value of ρ . The perturbed surface elevation pdf is now

$$\begin{aligned} \text{PDF}'(\rho, t) &= \text{PDF}(\rho, t) + \frac{A_0\delta(\rho - \rho_0)}{2\pi\rho_0} [G((1 + \Delta)\sigma_s, \tau, t - t_\rho) - G(\sigma_s, \tau, t - t_\rho)] \\ &\simeq \text{PDF}(\rho, t) + \frac{\Delta A_0\sigma_s\delta(\rho - \rho_0)}{2\pi\rho_0} \frac{\partial G(\sigma_s, \tau, t - t_\rho)}{\partial \sigma_s}, \end{aligned} \quad (\text{A5})$$

$$= \text{PDF}(\rho, t) + \frac{\Delta A_0\delta(\rho - \rho_0)}{2\pi\rho_0} G(\sigma_s, \tau, t - t_\rho) \frac{(t - \tau - t_\rho)^2 - \sigma_s^2}{\sigma_s^2}. \quad (\text{A6})$$

In the usual expressions, ρ is transformed to a time t_ρ with the following expression on the sphere

$$\frac{dt_\rho}{d\rho} = \frac{2\rho(1 + h/R_E)}{ch}. \quad (\text{A7})$$

Using this relation, we may now replace $\delta(\rho - \rho_0)$ by $\delta(t_\rho - t_{\rho_0})dt_\rho/d\rho$, to get the perturbed pdf as a function of two time scales,

$$\text{PDF}'(t_\rho, t) = G(\sigma_s, t) + a\delta(t_\rho - 4b\sigma_s)p(t - t_\rho), \quad (\text{A8})$$

with a and b defined by eqs. (8)–(9).

$$p(t) = \frac{1}{\sqrt{2\pi}} e^{-0.5\left(\frac{t-\tau}{\sigma_s}\right)^2} \left[\left(\frac{t-\tau}{\sigma_s} \right)^2 - 1 \right]. \quad (\text{A9})$$

The dimensionless parameter $a < 1$ is the product of the relative wave height change and the ratio of the area A_0 affected by that change and an equivalent footprint area $A_{\text{eq}} =$

$\pi c \sigma_s h / (1 + h/R_E)$ which is close to $\pi(\rho_C/2)^2$ or one quarter of the area of the oceanographic footprint defined by Chelton et al. (1989).

The convolution of $\text{FSSR}(t)$ and $\text{PDF}'(t)$ corresponds to an integration over the time t_ρ , which is eq. (2) in Brown (1977). It is thus the sum of two parts, the unperturbed part, and the perturbation given by the second term in eq. (A8),

$$\text{SSR}(t) = A\sigma_0 \left\{ ap(t - 4b\sigma_s) + \frac{1}{2} [1 + \text{erf}(u(t))] \right\} e^{-v(t)} + N_t, \quad (\text{A10})$$

with

$$u(t) = (t - \tau - c_\xi \sigma_s^2) / (\sqrt{2}\sigma_s), \quad (\text{A11})$$

$$v(t) = c_\xi (t - \tau - c_\xi \sigma_s^2 / 2). \quad (\text{A12})$$

$$A = \exp(-4 \sin^2 \xi / \gamma), \quad (\text{A13})$$

$$c_\xi = \frac{4c(4\text{mss} \cos(2\xi) + \gamma)}{h4\gamma\text{mss}} \quad (\text{A14})$$

$$\gamma = \frac{2}{\ln(2)} \sin^2(\theta_{3\text{dB}}), \quad (\text{A15})$$

where ξ is the antenna mispointing angle, $\theta_{3\text{dB}}$ is the antenna pattern parameter, N_t is the mean thermal noise, and mss is the mean square slope (Tourain et al., 2021).

Eq. (A10) corresponds to a modification of the adaptive model in Tourain et al. (2021) with the perturbation function $p(t - 4b\sigma_s)$ that is the difference of two Gaussian PDFs centered at $t = \tau + 4b\sigma_s$, with standard deviation σ_s and $(1 + \Delta)\sigma_s$.

In the case $b = 0$, we note that eq. (A10) is equivalent to the effect of surface elevation skewness derived by Hayne (1980), with $\lambda = 6a$, re-derived by Srokosz (1986) and used by Gómez-Enri et al. (2007).

The full waveform is finally obtained by convolution with the instrument PTR. In the absence of more information we have used,

$$\text{PTR}(t) = \text{sinc}^2(\pi Bt), \quad (\text{A16})$$

giving the waveform

$$S(t) = \text{SSR}(t) * \text{PTR}(t). \quad (\text{A17})$$

Appendix B Waveform simulation, retracking and verification

The waveforms are obtained from a realization of the sea surface elevation map using random phases over 4096 by 4096 points with a horizontal resolution of 14 m, hence covering 56 by 56 km. Each point of the surface is given a radar power based on the 2-way antenna pattern, and the waveform is given by the power-weighted histogram of the distribution of travel times between each point of the surface and the satellite. When speckle noise is included it corresponds to $N_p \times 320/400$ looks, which is the number of pulses per cycle, $N_p = 264$ for CFOSAT (Tourain et al., 2021), corrected for the resampling factor of the waveform, from 320 to 400 MHz. A "local significant wave height" is defined at each point as $H_l(x, y) = \sqrt{32/\pi} \times \eta(x, y)$ where η is the surface envelope (De Carlo et al., 2023), so that the spatial mean of H_l is the true underlying wave height H_s . The retracked wave height \hat{H}_s and epoch τ are computed for discrete satellite positions on a two-dimensional grid with a resolution of 350 m, as if the ocean were sampled by 106 satellites flying side by side and with a waveform computed every 0.05 s (a rate of 20 Hz) along each track. The result is a map of estimated parameters.

Fig. 9 shows some examples of such maps for different simulation settings, and fitting with ML or LS cost functions. Statistics for the retrieved parameters shown in Fig.

9, are summarized in table B1. We find that the root mean square (rms) wave height is underestimated with ML compared to LS, and the standard deviation of wave heights is larger with ML compared to LS, consistent with the retracking of the true waveforms in Fig. 2. We also note that the ML retrieved epoch and wave height are strongly correlated with $r = 0.85$, which is comparable to $r = 0.81$ in Fig. 2. For the purpose of reducing the epoch noise, for example taking $z'_e = \hat{z}_e - \alpha(\hat{H}_s - H_s)$, the LS data give lower noise residuals than the ML data.

Table B1. Statistics for wave height and epoch, for a surface with strong wave groups. Starting from the idealized waveform simulation which does not include the PTR at the top, we progressively add the PTR (no noise), then thermal noise, then the speckle.

PTR	thermal noise	speckle		\hat{H}_s (m) mean	std	\hat{z}_e (m) mean	std
×	×	×	ML, $r_{\min} = 0$	8.88	1.00	-0.122	0.24
			LS	9.23	0.70	0.000	0.07
✓	×	×	ML, $r_{\min} = 0$	9.14	0.96	0.328	0.22
			LS	9.27	0.70	0.001	0.07
✓	✓	×	ML, $r_{\min} = 0$	9.14	0.96	-0.045	0.22
			LS	9.27	0.70	0.001	0.07
✓	✓	✓	ML	9.14	0.96	-0.045	0.23
			ML, $r_{\min} = 0.06$	9.23	0.78	-0.009	0.11
			LS	9.28	0.77	0.002	0.08

Appendix C Influence of r_{\min}

When using ML retracking, one may optimize the contribution of the lowest range gates used in ML fitting. Here we investigate the influence of the choice of r_{\min} , and try to maximize the coherence with our "reasonable truth" given by $H_{l,\sigma=\rho_C/4}$ over the widest possible range of scales, while keeping a near-zero phase shift, and getting perturbations on the epoch as low as possible. The value $r_{\min} = 0.06$ that gave results similar to the CFOSAT in Fig. 2 appears to be a good compromise. Fig. C1 shows that lower values of r_{\min} will all produce more noise in the epoch. Higher values reduce the range of wavenumbers with high coherence, giving results closer to the LS retracking, with a wider range of short scales for which the retracked values are out of phase of the true perturbations.

Appendix D Consequences for retracking

This paper dealt with existing datasets, already retracked with existing methods, but our results may be used to refine retracking methods and better interpret alternatives. On a basic level, it is possible that some averaging before retracking may provide more robust results. Also, the results on along-track correlations and uncertainty model may differ for methods we did not cover: for example the use of range-dependent weights in the ALES (Passaro et al., 2014) and WHALES (Schlombach et al., 2020) modifies the \hat{J}_H function as shown in Fig. 6. Alternatively when a skewness parameter is added to the set of fitting parameters, following Hayne (1980), it will catch the waveform distortion caused by wave groups near nadir. One could imagine adding more degrees of freedom to the waveforms with a sum of wave group contributions $a(b)$ for each range b , and

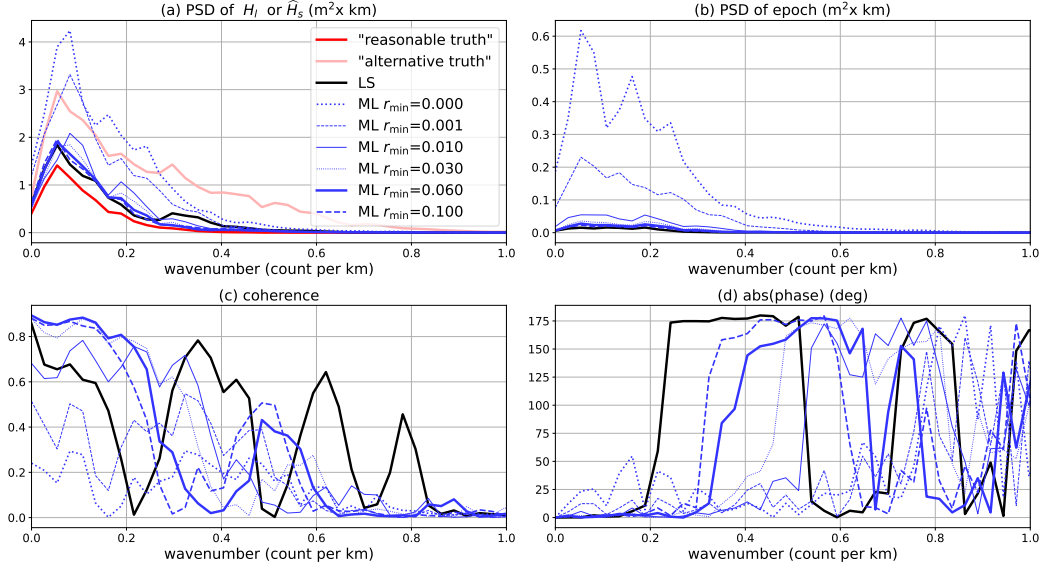


Figure C1. Same layout as Fig. 10, with additional lines for different values of r_{min} .

ideally one may want to estimate these values of $a(b)$ for each discrete range, and inverting the black curve $H_b(b)$ in Fig. 7.e from the waveform in 7.f.

Since the possible adjustment to retracking methods are endless and best choices probably depend on the chosen application (e.g. characterizing wave group properties, reducing noise on sea level estimates ...) we will not go down this path here. Instead we just illustrate how a modified retracker may better fit the waveform: we have chosen 2 variants on the LS and ML retracker (here termed LS2 and ML2 for clarity) used in Fig. 2. In LS3 and ML3 we add a the skewness parameter $\lambda_{3,0,0}$ as defined by Srokosz (1986), which is the skewness of the surface elevation points of zero slope, and in our model waveform corresponds to 6 times the amplitude of wave group perturbations at nadir $\lambda_{3,0,0} = 6a(b=0)$. This is the approach followed by Callahan and Rodriguez (2004) and Gómez-Enri et al. (2007), with the minor difference is that we use SWIM L1B data in which the antenna pattern and power have been corrected for, so that we do not have to deal with the usual other unknowns that are the mispointing and σ_0 . In LS4 and ML4 we allow the Brown waveform to have one wave group perturbation of amplitude a but that can be range b : because the possible waveforms fits with LS3 and ML3 are a subset of those for LS4 and ML4, the fits are at least as good with that other option, in the cases where the minimization method found the global minimum.

Results in Fig. fig:4Dretrack show the values of wave heights, and $\lambda_{3,0,0}$ (or $6 \times a$ for LS4 and ML4), and two waveforms corresponding the the two highest values of \hat{H}_s in the native CFOSAT data, here corresponding to the 20th and 49th (last) waveform in that sequence. We recall that the acquisition rate is 4.5 Hz, so that the nadir positions for consecutive waveforms are separated by about 1.5 km.

The first clear outcome shown in panel (a) is that LS3 and ML3 give wave heights very close to LS2 and ML2, with slightly lower extremes, and LS4 and ML4 give much lower value for the extremes (waveforms 20 and 49) but often fail to converge to reasonable values (waveforms 39 for LS4, 16, 22, 23 ... for ML4): this is not proposed as a practical retracking method but as a tool to understand some of the parameter variations. In panel (b), $\lambda_{3,0,0}$ fluctuations (-1 to 2) are much larger than its mean value of 0.17 with LS3 and 0.09 with ML3. We note that the mean value of $\lambda_{3,0,0}$ from ML3 is consistent

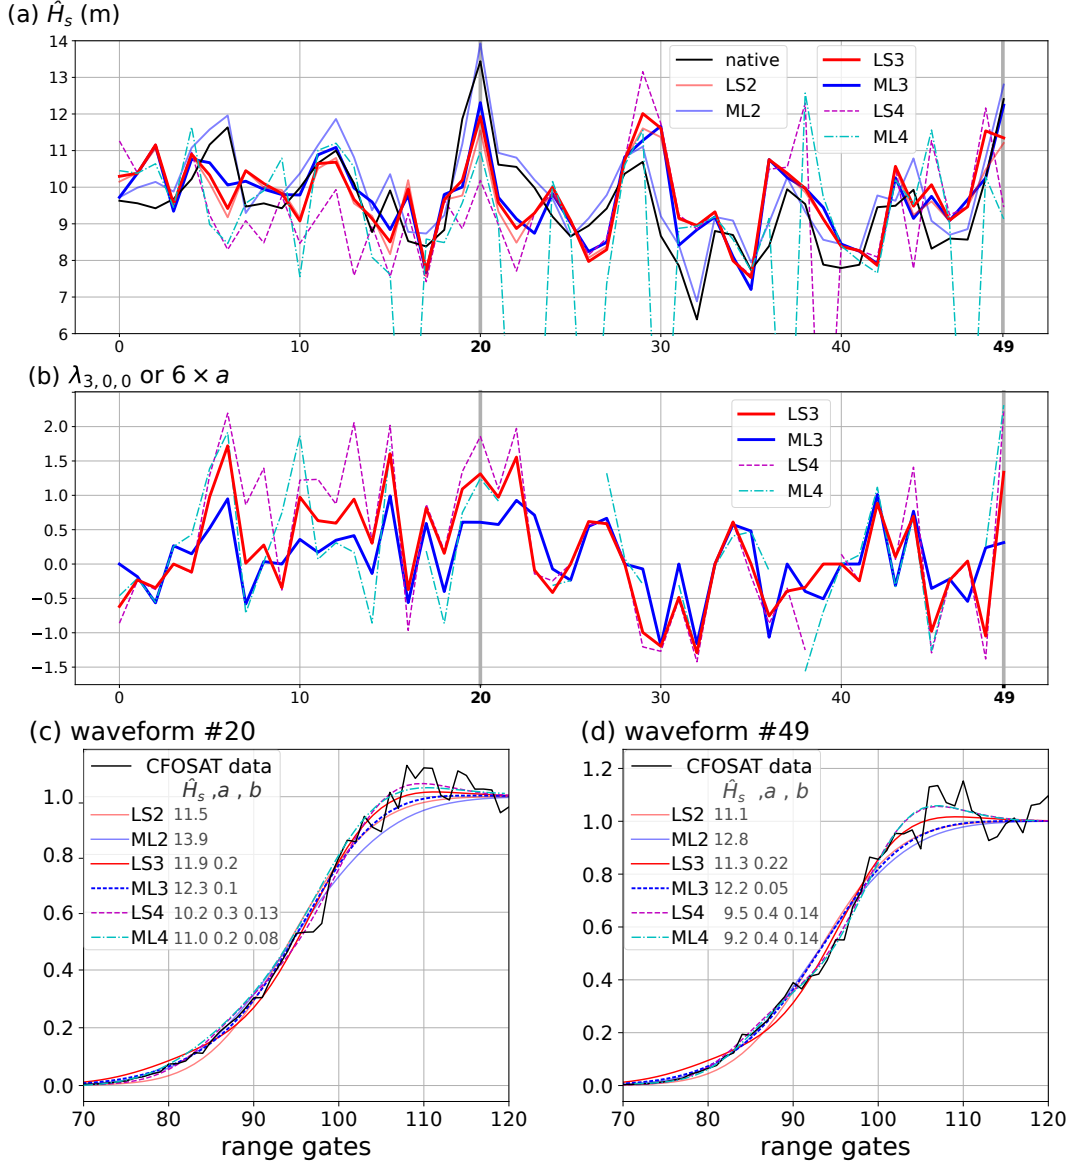


Figure D1. Retracked values of (a) \hat{H}_s and (b) $\lambda_{3,0,0}$ or $6 \times a$ using 2, 3 or 4 parameter retrackers applied to the same CFOSAT waveforms (c) and (d) waveform number 30 and 49 in that sequence, and associated fits.

with the skewness of 0.08 estimated from the CFOSAT directional spectrum using the method of Srokosz (1986) as implemented in the ECWAM model (Janssen, 2014). We suspect that the larger mean value for LS3 is caused by speckle noise, and estimating $\lambda_{3,0,0}$ is probably better done by first averaging several waveforms before retracking.

For waveforms number 20 and 49, we may expect that there is some significant wave group contribution, with a maximum H_l that could be close to nadir for #20 because of the stronger value of \hat{H}_s with ML2 compared to LS2, based on the different shapes of \hat{H}_H in Fig. 6. When the fitting waveform is allowed to have some skewness effect, the value of \hat{H}_s is reduced from 13.9 with ML2 to 12.3 m with ML3 as we are effectively removing the effect of wave groups at nadir, and $\hat{H}_{H,ML2}$ is sensitive to these. This is not the case when changing from LS2 to LS3. However, if we allow the wave group pertur-

bation to be away from nadir, then \hat{H}_s drops to 10.2 m with LS4 compared to 11.5 with LS2, and the optimal perturbation position is placed at $b = 0.13$. Things are a little different for waveform #49, presumably because the perturbations are located further from nadir. In that case ML3 is not very different from ML2, but both LS4 and ML4 give a much lower wave height, at 9.5 and 9.2 m respectively, with $b = 0.14$.

Acknowledgments

All CFOSAT data are provided by courtesy of CNSA and CNES. This research was made possible by support from ESA as part of the Sea State CCI project. MDC was supported by a postdoctoral grant from the Centre National d'Études Spatiales (CNES). MDC would like to thank Jean-François Piolle from Ifremer for the data management support. We are very grateful to Annabelle Ollivier, Alejandro Bohe, Bertrand Chapron and Marecello Passaro for in depth discussions that have led to a clearer exposition of the results.

Open Research

The L2 and L2P SWIM data sets used here corresponds to the files reprocessed in version 5.1.2 and made available by CNES on the ftp server of AVISO+ (<ftp-access.aviso.altimetry.fr>, directories `cfosat/swim_l2_op05` and `cfosat/swim_l2p_box_nrt/`), accessible to anyone after registration. Surface simulation and retracking software was developed in Python using elements from the WHALES retracker provided by M. Passaro, and is available at ftp://ftp.ifremer.fr/ifremer/ww3/COM/PAPERS/2024_DECARLO_ARDHUIN_JGR or from the permanent link <https://doi.org/10.17882/97944>

References

- Abdalla, S., Janssen, P., & Bidlot, J.-R. (2011). Altimeter near real time wind and wave products: Random error estimation. *Marine Geodesy*, *34*, 396–406. doi: 10.1080/01490419.2011.585113
- Alday, M., & Ardhuin, F. (2023). On consistent parameterizations for both dominant wind-waves and spectral tail directionality. *J. Geophys. Res.*, *128*, e2022JC019581. doi: 10.1029/2022JC019581
- Altiparmaki, O., Kleinherenbrink, M., Naeije, M., Slobbe, C., & Visser, P. (2022). Sar altimetry data as a new source for swell monitoring. *Geophys. Res. Lett.* doi: 10.1029/2021GL096224
- Ardhuin, F., Brandt, P., Gaultier, L., Donlon, C., Battaglia, A., Boy, F., ... Stammer, D. (2019). Skim, a candidate satellite mission exploring global ocean currents and waves. *Frontiers in Marine Sci.*, *6*, 124. doi: 10.3389/fmars.2019.00209
- Ardhuin, F., Chapron, B., & Elfouhaily, T. (2004). Waves and the air-sea momentum budget, implications for ocean circulation modelling. *J. Phys. Oceanogr.*, *34*, 1741–1755. doi: 10.1175/1520-0485%282004%29034%3C1741%3AWATAMB%3E2.0.CO%3B2
- Ardhuin, F., Rascle, N., Chapron, B., Gula, J., Molemaker, J., Gille, S. T., ... Rocha, C. (2017). Small scale currents have large effects on wind wave heights. *J. Geophys. Res.*, *122*(C6), 4500–4517. doi: 10.1002/2016JC012413
- Ardhuin, F., Stopa, J. E., Chapron, B., Collard, F., Husson, R., Jensen, R. E., ... Young, I. (2019). Observing sea states. *Frontiers in Marine Sci.*, *6*, 124. doi: 10.3389/fmars.2019.00124
- Arhan, M., & Ezraty, R. (1978). Statistical relations between successive wave heights. *Oceanol. Acta*, *1*, 151–158.
- Brown, G. S. (1977). The average impulse response of a rough surface and its applications. *IEEE J. Oceanic Eng.*, *2*(1), 67–63. doi: 10.1109/JOE.1977.1145328

- Callahan, P. S., & Rodriguez, E. (2004). Retracking of Jason-1 data. *Marine Geodesy*, 27, 391–407. doi: 10.1080/01490410490902098
- Cazenave, A., Palanisamy, H., & Ablain, M. (2018). Contemporary sea level changes from satellite altimetry: What have we learned? what are the new challenges? *Adv. Space Res.*, 62, 1639–1653. doi: 10.1016/j.asr.2018.07.017
- Challenor, P. G., & Srokosz, M. A. (1989). The extraction of geophysical parameters from radar altimeter returns from a nonlinear sea surface. In S. R. Brooks (Ed.), *Mathematics in remote sensing* (pp. 256–268). Clarendon Press, Oxford.
- Chelton, D. B., Walsh, E. J., & MacArthur, J. L. (1989). Pulse compression and sea level tracking in satellite altimetry. *J. Atmos. Ocean Technol.*, 6, 407–438. doi: 10.1175/1520-0426(1989)006<0407:pcastl>2.0.co;2
- Collard, F., Marié, L., Nouguier, F., Kleinherenbrink, M., Ehlers, F., & Ardhuin, F. (2022). Wind-wave attenuation in arctic sea ice: A discussion of remote sensing capabilities. *J. Geophys. Res.*, 127, e2022JC018654. doi: 10.1029/2022JC018654
- De Carlo, M., Ardhuin, F., Ollivier, A., & Nigou, A. (2023). Wave groups and small scale variability of wave heights observed by altimeters. *J. Geophys. Res.*, 133, e2023JC019740. doi: 10.1029/2023JC019740
- Dibarboure, G., Boy, F., Desjonquieres, J. D., Labroue, S., Lasne, Y., Picot, N., ... Thibaut, P. (2014). Investigating short-wavelength correlated errors on low-resolution mode altimetry. *J. Atmos. Ocean Technol.*, 31, 1337–1362. doi: 10.1175/JTECH-D-13-00081.1
- Dodet, G., Piolle, J.-F., Quilfen, Y., Abdalla, S., Accensi, M., Ardhuin, F., ... Donlon, C. (2020). The sea state cci dataset v1: towards a sea state climate data record based on satellite observations. *Earth System Sci. Data*, 12, 1929–1951. doi: 10.5194/essd-12-1929-2020
- Gagnaire-Renou, E., Benoit, M., & Forget, P. (2010). Ocean wave spectrum properties as derived from quasi-exact computations of nonlinear wave-wave interactions. *J. Geophys. Res.*, 115, C12058. doi: 10.1029/2009JC005665
- Gómez-Enri, J., Gommenginger, C. P., Srokosz, M. A., & Challenor, P. G. (2007). Measuring global ocean wave skewness by retracking RA-2 Envisat waveforms. *J. Atmos. Ocean Technol.*, 24, 1102–1107. doi: 10.1175/JTECH2014.1
- Hanafin, J., Quilfen, Y., Ardhuin, F., Sienkiewicz, J., Queffelec, P., Obrebski, M., ... Stutzmann, E. (2012). Phenomenal sea states and swell radiation: a comprehensive analysis of the 12–16 February 2011 North Atlantic storms. *Bull. Amer. Meteorol. Soc.*, 93, 1825–1832. doi: 10.1175/BAMS-D-11-00128.1
- Hauser, D., Tourain, C., Hermozo, L., Alraddawi, D., Aouf, L., Chapron, B., ... Tran, N. (2021). New observations from the SWIM radar on-board CFOSAT: Instrument validation and ocean wave measurement assessment. *IEEE Trans. on Geosci. and Remote Sensing*, 59(1), 5–26. doi: 10.1109/tgrs.2020.2994372
- Hayne, G. (1980). Radar altimeter mean return waveforms from near-normal-incidence ocean surface scattering. *IEEE Trans. Antennas Propagat.*, 28, 687–692. doi: 10.1109/tap.1980.1142398
- Janssen, P. A. E. M. (2014). On a random time series analysis valid for arbitrary spectral shape. *J. Fluid Mech.*, 759, 236–256. doi: 10.1017/jfm.2014.565
- Lavrenov, I. V. (2001). Effect of wind wave parameter fluctuation on the nonlinear spectrum evolution. *J. Phys. Oceanogr.*, 31, 861–873. doi: 10.1175/1520-0485(2001)031<0861:EOWWPF>2.0.CO;2
- Longuet-Higgins, M. S., & Stewart, R. W. (1962). Radiation stresses and mass transport in surface gravity waves with application to ‘surf beats’. *J. Fluid Mech.*, 13, 481–504.
- Moreau, T., Tran, N., Aublanc, J., Tison, C., Gac, S. L., & Boy, F. (2018). Impact of long ocean waves on wave height retrieval from sar altimetry data. *Adv. Space Res.*, 62(6), 1434–1444. doi: 10.1016/j.asr.2018.06.004

- Morrow, R., & Le Traon, P.-Y. (2012). Recent advances in observing mesoscale ocean dynamics with satellite altimetry. *Adv. Space Res.*, *50*, 1062–1076. doi: 10.1016/j.asr.2011.09.033
- Passaro, M., Cipollini, P., Vignudelli, S., Quartly, G. D., & Snaith, H. M. (2014). ALES: A multi-mission adaptive subwaveform retracker for coastal and open ocean altimetry. *Remote sensing of Environment*, *145*, 173–189.
- Passaro, M., Hemer, M. A., Quartly, G. D., Schwatke, C., Dettmering, D., & Seitz, F. (2021). Global coastal attenuation of wind-waves observed with radar altimetry. *Nature communications*, *12*, 3812. doi: 10.1038/s41467-021-23982-4
- Quartly, G. D., Smith, W. H. F., & Passaro, M. (2019). Removing intra-1-Hz covariant error to improve altimetric profiles of σ_0 and sea surface height. *IEEE Trans. on Geosci. and Remote Sensing*, *57*(6), 3741–3752. doi: 10.1109/TGRS.2018.2886998
- Quartly, G. D., Srokosz, M. A., & McMillan, A. C. (2001). Analyzing altimeter artifacts: Statistical properties of ocean waveforms. *J. Atmos. Ocean Technol.*, *18*, 2074–2091. doi: 10.1175/1520-0426(2001)018<2074:AAASPO>2.0.CO;2
- Quilfen, Y., Yurovskaya, M., Chapron, B., & Ardhuin, F. (2018). Storm waves sharpening in the Agulhas current: satellite observations and modeling. *Remote sensing of Environment*, *216*, 561–571. doi: 10.1016/j.rse.2018.07.020
- Rice, S. (1944). Mathematical analysis of random noise. In N. Wax (Ed.), *Noise and stochastic processes* (pp. 133–294). New York: Dover Publications Inc. (published 1954).
- Rieu, P., Moreau, T., Cadier, E., Raynal, M., Clerc, S., Donlon, C., ... Maraldi, C. (2021). Exploiting the sentinel-3 tandem phase dataset and azimuth oversampling to better characterize the sensitivity of sar altimeter sea surface height to long ocean waves. *Adv. Space Res.*, *67*, 253–265. doi: 10.1016/j.asr.2020.09.037
- Rodriguez, E. (1988). Altimetry for non-gaussian oceans: Height biases and estimation of parameters. *J. Geophys. Res.*, *93*, 14107–14120. doi: 10.1029/JC093iC11p14107
- Sandwell, D. T., & Smith, W. H. F. (2005). Retracking ers-1 altimeter waveforms for optimal gravity field recovery. *Geophys. J. Int.*, *163*, 79–89. doi: 10.1111/j.1365-246X.2005.02724.x
- Schlembach, F., Passaro, M., Quartly, G. D., Kurekin, A., Nencioli, F., Dodet, G., ... Donlon, C. (2020). Round robin assessment of radar altimeter low resolution mode and delay-doppler retracking algorithms for significant wave height. *Remote Sensing*, *12*, 1254. doi: 10.3390/rs12081254
- Srokosz, M. A. (1986). On the joint distribution of surface elevation and slopes for a non linear random sea, with an application to radar altimetry. *J. Geophys. Res.*, *91*, 995–1006.
- Tayfun, A., & Lo, J.-M. (1989). Wave envelope and related spectra. *J. of Waterway, Port Coast. Ocean Eng.*, *115*, 515–533. doi: 10.1061/(ASCE)0733-950X(1989)115:4(515)
- Tourain, C., Piras, F., Ollivier, A., Hauser, D., Poisson, J. C., Boy, F., ... Tison, C. (2021). Benefits of the adaptive algorithm for retracking altimeter nadir echoes: Results from simulations and CFOSAT/SWIM observations. *IEEE Trans. on Geosci. and Remote Sensing*, *59*, 9927–9940. doi: 10.1109/TGRS.2021.3064236
- Vignudelli, S., Birol, F., Benveniste, J., Fu, L., Picot, N., Raynal, M., & Roinard, H. (2018). Satellite altimetry measurements of sea level in the coastal zone. *Surv. Geophys.*, *40*, 1319–1349. doi: 10.1007/s10712-019-09569-1
- Young, I. R. (1986). Probability distribution of spectral integrals. *J. of Waterway, Port Coast. Ocean Eng.*, *112*, 338–341.
- Zanifé, O. Z., Vincent, P., Amarouche, L., Dupont, J. P., Thibaut, P., & Labroue, S. (2013). Comparison of the Ku-band range noise level and the relative sea-

1016 state bias of the Jason-1, TOPEX, and Poseidon-1 radar altimeters. *Marine*
1017 *Geodesy*, *26*, 201–238. doi: 10.1080/01490410390255737
1018 Zaron, E. D., & DeCarvalho, R. (2016). Identification and reduction of retracker-
1019 related noise in altimeter-derived sea surface height measurements. *J. Atmos.*
1020 *Ocean Technol.*, *33*(6), 201–210. doi: 10.1175/JTECH-D-15-0164.1